


Architectural Series, Fire Protection Cabinet, Embassy - C5614V17FX2

FE FX2 CABINET, EMBASSY, TRMLSS, VERT DUO, CLR TEMP, ALL CRS, ALL WHT, 56 TUB

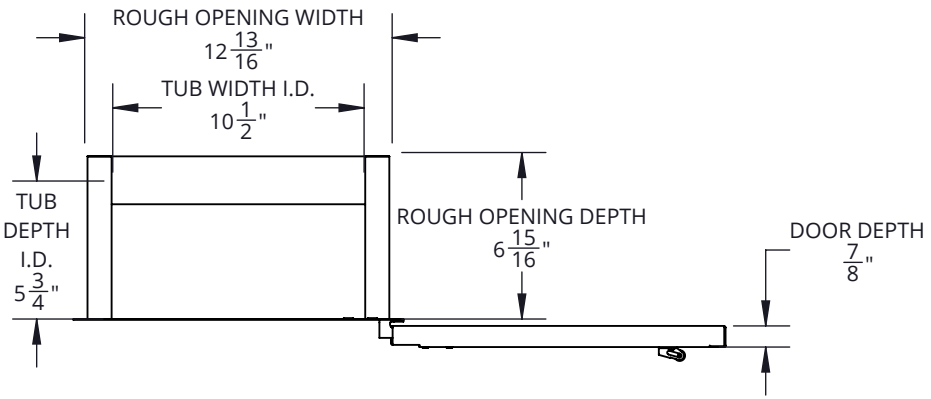

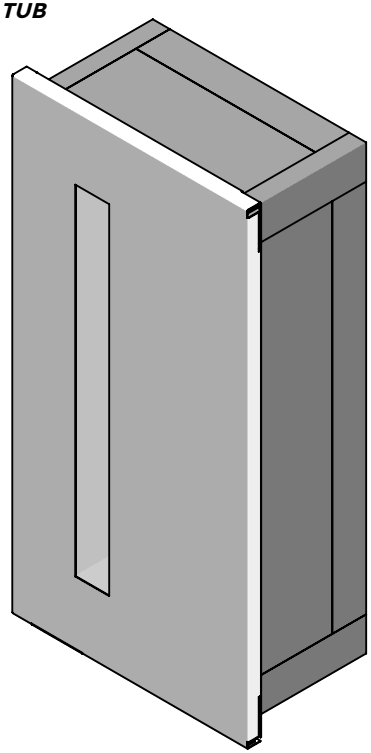

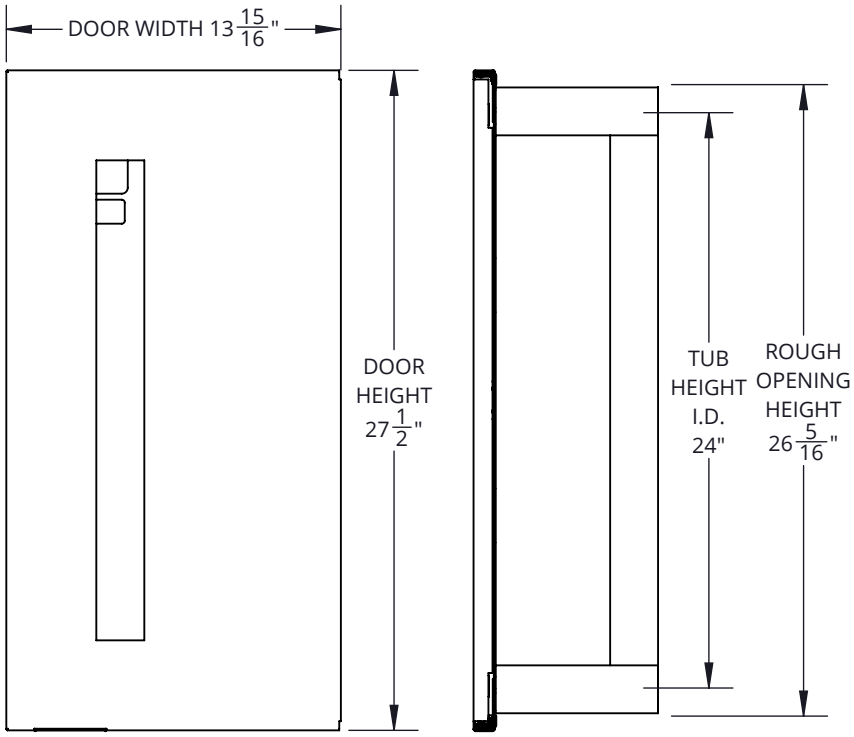

SPECIFICATIONS:

Tub Material: 22 gauge CRS

Door Material & Style: 20 gauge CRS, vertical duo

Glazing: ⅛" clear tempered glass (3-⅛" x 22-¾")

Finish: Powder coat white door and white tub

Hinge: Continuous hinge opens door 180 degrees, 20 gauge CRS

Hardware: Roller catch, glass clips & screws

Rough Opening: 12-13/16" x 26-5/16" x 6-15/16"

Fire Rating: UL classified and labeled up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/USC-S115.

Insulation: Foil-faced mineral wool

ADA Compliant: Cabinet meets 4" maximum protrusion, locate handle maximum 48" above floor

Compatible Extinguisher: Any Cosmic, Galaxy, Mercury, Saturn, Nebula 250-272 or Grenadier, Sentinel 5lb - 15lb

MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet

56 — Tub Size: 10-½" x 24" x 5-¾"

1 — Trim and Door Material: CRS, powder coat finish

4 — Trim Style: Trimless recessed flange

V — Door Style: Vertical duo, pull handle, roller catch

17 — Door Glazing: ⅛" clear tempered glass

FX2 — Fire Rated

— Color: All white

REPLACEMENT PARTS:

Tub: TUB-56FX2

Door: D-561VFX2

Glazing: G10V17

Hardware Pack: HPF

MODEL #: C5614V17FX2

JL INDUSTRIES

800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:		Project:
Contractor:		Approved By:
Date:	Quantity:	Architect:
Scale: 1:8	Pages: 1 OF 1	Drawing #: C5614V17FX2-SUBMITTAL

© 2025 Activar Construction Products Group, Inc. THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.

REV: A 10/21/2025