



KITCHEN FIRE SUPPRESSION SYSTEM

UL EX4658

BULLETIN NO.

SL-204

Date: July 2023

To: Authorized Amerex Distributors and OEMs

From: Sales and Product Management—Kitchen Systems

Re: KP protection for Chick-fil-A Garland Grill 2.0—Model: CXPB12

Note: This technical bulletin serves as an addition to the KP/ZD Design, Installation, Maintenance, & Recharge Manual P/N 20150 Amerex Restaurant Fire Suppression System dated February 14th, 2019. This technical bulletin is not meant to replace any requirements and/or limitations within, and the information in the bulletin will be added at the next revision. This bulletin defines a UL LISTED COVERAGE for the protection of the listed appliance(s).

Amerex is announcing the addition of an appliance-specific KP fire protection coverage for the Chick-fil-A Garland 2.0 CXPB12 Electric Dual Side Clamshell Grill. This coverage must be installed in accordance with all requirements of NFPA (National Fire Protection Association) 17A and NFPA 96.

The coverage utilizes QTY (1) 14178 (2 flow) nozzle. The nozzle is to be mounted above the left or right side of the grill.

Nozzle Type: 14178 (2 flow)

Nozzle Quantity: 1

Nozzle Height: 24 in to 26 in (610 mm to 660 mm) above bottom cooking surface.

Nozzle Location: 4 in \pm 1 in (102 mm \pm 25 mm) from left or right side edge of bottom cooking surface.

Nozzle Aim Point: Center of bottom cooking surface.

Grill Specifications:

Top Cooking Surface: 10.2 in x 22.4 in (259 mm x 569 mm)

Bottom Cooking Surface: 10.8 in x 22.2 in (274 mm x 564 mm)

Input Ratings: 9.2 kW



KITCHEN FIRE SUPPRESSION SYSTEM

UL EX4658

BULLETIN NO.

SL-204

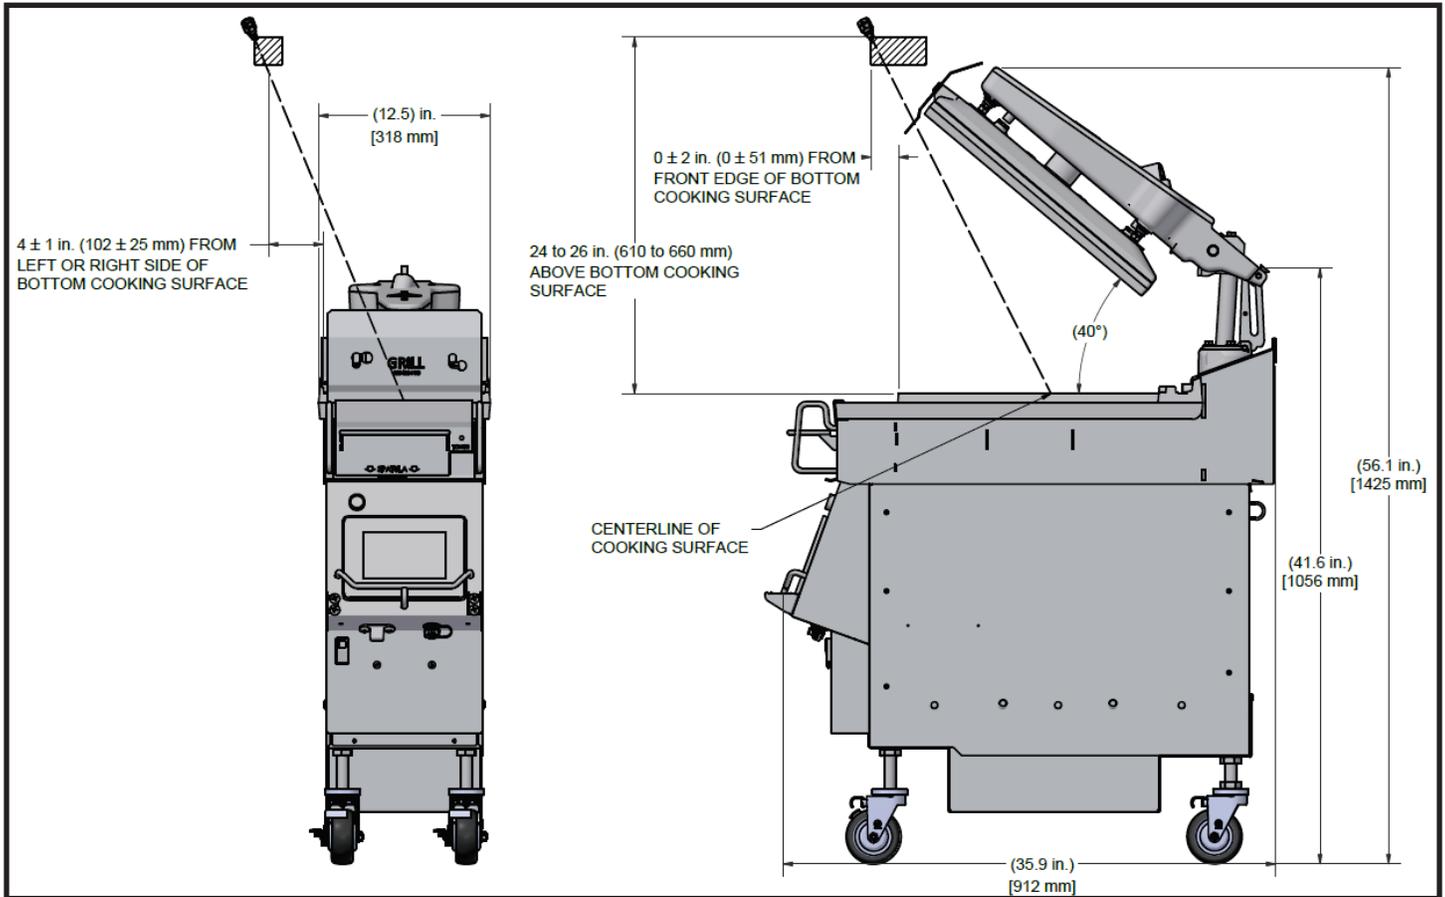


Figure 1: Nozzle Placement and Aim