

FIRE PROTECTION CATALOG

DIVISION 10 44 00

FIRE EXTINGUISHERS
FIRE PROTECTION CABINETS
FIRE BLANKETS

DIVISION 21 12 00

FIRE-SUPPRESSION HOSES
HOSE RACKS, VALVES & NOZZLES

ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.

OUR BRANDS

Activar Construction Products Group develops and manufactures innovative products under the trusted brands JL Industries, Cato, Dur-Red, and Air Louvers. Headquartered in Bloomington, Minnesota, we operate multiple manufacturing facilities and strategically located warehouses for efficient distribution and fast delivery to major metropolitan areas throughout the United States.

JL INDUSTRIES

The legacy brand of JL Industries began with fire extinguishers and cabinets and has grown to include access panels, roof accessories, emergency specialties, corner guards, floor doors and entrance floor systems. Through our vast variety of options, our line of products meets the needs for small and large projects. Our knowledgeable sales representatives work closely with our nationwide distribution partners to support your goals from start to finish.



Ambassador
1017F10

CATO

CATO specializes in manufacturing a complete line of durable plastic fire extinguisher cabinets and protective covers for fire alarms that are made in the U.S.A. From surface-mount to semi-recessed cabinets, we accommodate most 5, 10, or 20 lb. fire extinguishers. Whether corrosion is a concern or an MRI-safe cabinet is required, our non-rusting models are the clear choice.

STOCKING WAREHOUSES

We offer 1-5 day shipping on our most popular products from our manufacturing and warehouse locations in the U.S. Find the most current stock list and other product information on our website at activarcpg.com.

Manufacturing: Minneapolis, MN | Los Angeles, CA
Warehouses: Fort Myers, FL | Atlanta, GA | Chicago, IL | Fargo, ND | Omaha, NE | Lancaster, PA | Salt Lake City, UT | Dallas, TX | Seattle, WA

WARRANTY

All fire protection products carry a one-year warranty after the date of shipment against defects in materials and workmanship. We will replace or repair any product found defective within this period at our discretion. No other warranty express or implied is valid. Fire extinguishers may carry a longer warranty.

AMERICANS WITH DISABILITIES ACT (ADA) GUIDELINES

PROJECTION REQUIREMENTS

The federal regulations for ADA Standards for protruding objects such as fire extinguisher cabinets, specify that “objects projecting from walls with their leading edges between 27” and 80” above the finished floor (AFF) shall protrude no more than 4” into walkways."

Look for Model Numbers in Blue to find cabinets that meet the ADA 4" Projection Requirement.

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

TABLE OF CONTENTS

FIRE EXTINGUISHERS:

Cosmic, Galaxy, Saturn, Mercury, Sentinel 4-5
Nebula, Granadier....5
Purple K, Orbit, Wheeled, Fire Extinguisher Stand....6-7
Brackets, J-Hooks....7

ARCHITECTURAL CABINETS:

Ambassador - *Steel* 8-9
Academy - *Aluminum* 8-9
Cosmopolitan - *Stainless Steel*....8-9
Panorama - *Steel, Aluminum, Stainless Steel, Brass, Bronze*....8-9
Cavalier - *Brass, Bronze*....10-11
Clear Vu - *Steel, Aluminum, Stainless Steel, Brass, Bronze*....10-11
Embassy - *Steel, Aluminum, Stainless Steel, Brass, Bronze* 12-13
Orbit Cabinet - *Steel, Aluminum, Stainless Steel, Brass, Bronze* 12-13
Royal Series - *Steel, Aluminum, Stainless Steel*....12-13
Crownline Valve/Hose - *Steel, Aluminum, Stainless Steel*....14-15
Architectural Door Styles 16
Architectural Cabinets Model Number Guide 17

SPECIALTY CABINETS:

FB Fiberglass 18-19
Fire Hose Equipment Series *Steel, Galvanneal* 18-19
HRA Series 18-19
Security Series - *Steel, Stainless Steel* 20-21
School Series - *Steel, Stainless Steel*....20-21
Ligature Resistant Guardsman™ Series - *Steel, Stainless Steel*....20-21
Security Lock Options....22
Lock Boxes 23

ECONOMICAL CABINETS:

Classic - *Galvanneal Steel, Aluminum* 24-25
Economyline - *Steel, Aluminum*....24-25
Decorline - *Steel, Aluminum* 24-25

CATO PLASTIC:

Cato Chief - *Plastic*....26
Cato Island Chief - *Plastic*....26
Cato Chief Pull to Open - *Plastic*....27
Cato Chief Semi Recessed - *Plastic*....27
Cato Warrior - *Plastic*....28
Cato Customizer Panel 28
Cato Accessories & Decals....29
Cato Cabinet Model Number Guide....30
Cato Fire Alarm Covers - *Plastic* 31

OPTIONS & ACCESSORIES:


Alarm and Lettering Options....32
Handle Options & Color Chart....33
Decals, Diecuts, Plastic Signs 34-35



ABOUT JL INDUSTRIES FIRE-FX2® FIRE-RATED CABINETS

JL Industries led the industry by introducing the first pre-lined Fire-Rated Cabinets in 1991. Those cabinets have changed and simplified the installation process forever. In 2015, JL took the next step and eliminated the heavy gypsum wallboard to line cabinets, by replacing it with lightweight, mineral wool insulation.

UL classified and labeled up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/USC-S115

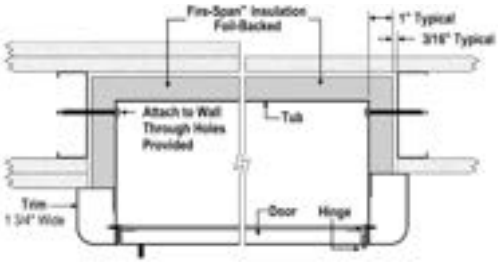

This view is for metal or wood framing installation

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



COSMIC EXTINGUISHERS: MULTI-PURPOSE DRY CHEMICAL — CLASS A,B,C FIRES

These units contain specially fluidized and siliconized mono ammonium phosphate powder, which smothers and breaks the chain reaction on Class B fires, fuses and insulates Class A fires and is a non-conductor of electricity. Non-toxic.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Upright squeeze grip operation approved to -65°F (-52°C)

Construction: Heavy-duty steel cylinder with rugged metal valve and siphon tube, replaceable molded valve stem seal, visual pressure gauge, pull pin and upright squeeze grip. Corrosion and impact-resistant powder coat finish



GALAXY EXTINGUISHERS: REGULAR DRY CHEMICAL — CLASS B,C FIRES

These models contain a siliconized sodium bicarbonate base, the traditional dry chemical. Cleanup after use is generally easy, because the chemical does not normally bake to a hot metal surface. Non-toxic.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Upright squeeze grip operation approved to -65°F (-52°C)

Construction: Heavy-duty steel cylinder with rugged metal valve and siphon tube with replaceable valve stem seal, visual pressure gauge pull pin and upright squeeze grip



SATURN EXTINGUISHERS: CLASS A:K WET CHEMICAL — CLASS A, K FIRES

A low "pH" potassium acetate solution is discharged in a fine mist that provides excellent range while preventing splashing and creating an effective saponification foam-type blanket necessary for suppressing liquid cooking media fires.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out

Construction: Stainless steel cylinder with protective nozzle tip orifice seal and non-metallic nozzle tip finger guard. Industry standard horn and nozzle design. Name plate shows only the class "K" symbol



MERCURY EXTINGUISHERS: HALOTRON® — CLASS A,B,C FIRES

Contains the clean extinguishing agent Halotron® 1, which is EPA-approved, government-accepted and specified. This agent discharges as a liquid, then quickly evaporates, leaving no residue to clean up afterwards. Electrically non-conductive.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Temperature range from -40°F to +120°F

Construction: Drawn steel cylinder with steel siphon tubes, power cone discharge stream, upright squeeze grip visual pressure gauge and corrosion-resistant paint finish



SENTINEL EXTINGUISHERS: CARBON DIOXIDE — CLASS B,C FIRES

This extinguisher contains liquid carbon dioxide under pressure. Electrically non-conductive.

Operation: Squeeze the lever, which opens the valve, allowing the carbon dioxide to be forced out. The discharge, which changes into a gas and appears as a smothering cloud of white snow, is then directed to the fire through a funnel-shaped horn

Construction: Lightweight, high-pressure, aluminum cylinder with O-ring seal and straight thread all-metal valve fits all sizes. The Sentinel is absolutely rust-free and up to 30% lighter than CO_2 units with steel cylinders

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



NEBULA EXTINGUISHERS: WATER MIST FOR ELECTRICAL — CLASS A,C FIRES

This non-toxic water mist extinguisher is ideal for Class A fires and where a potential Class C (electrical) hazard exists. Units shipped empty.

Operation: The unique misting nozzle provides safety from electrical shock, making this extinguisher ideal for use in telecommunications and cleanroom environments

Construction: Non-magnetic cylinder and misting nozzle. For use in medical facilities



GRENADIER EXTINGUISHERS: PRESSURIZED WATER — CLASS A FIRES

The "water press" extinguisher contains water and compressed air. Units shipped empty.

Operation: Squeeze the lever, which opens the valve, allowing the water to be forced out. Upright squeeze grip

Construction: Butt-welded 304-L stainless steel cylinder. Heavy-duty, brass, chrome-plated valve body with replaceable molded valve stem seal

MODEL	DESCRIPTION	NOMINAL CAPACITY	SHIPPING WEIGHT	CYLINDER DIAMETER	OVERALL HEIGHT	OVERALL WIDTH	SHIPPING VOLUME	U/L RATING	OPTIONAL MOUNTING BRACKET
FE02C	Cosmic 2.5E*	2-½ lbs.	5-½ lbs.	3-⅜"	15-½"	5-¾"	.2 cu.ft.	1-A:10-B:C	MB817C
FE05C	Cosmic 5E	5 lbs.	10 lbs.	4-¼"	16-⅜"	7-¼"	.35 cu.ft.	3-A:40-B:C	MB818C
FE06A	Cosmic 6E	6 lbs.	12-¾ lbs.	5"	16"	7-¾"	.5 cu.ft.	3-A:40-B:C	MB808A
FE10C	Cosmic 10E	10 lbs.	18-¼ lbs.	5-⅛"	21"	7-¾"	.65 cu.ft.	4-A:80-B:C	MB846C
FE20C	Cosmic 20E	20 lbs.	33-½ lbs.	7-½"	21-¼"	8-¾"	1.0 cu.ft.	10-A:120-B:C	MB811C
FG02C	Galaxy 2.5*	2-½ lbs.	5-½ lbs.	3-⅜"	14-¼"	4-⅞"	.2 cu.ft.	10-B:C	MB817C
FG055C	Galaxy 5.5	5-½ lbs.	10-½ lbs.	4-¼"	16-⅜"	7-¼"	.4 cu.ft.	40-B:C	MB818C
FG10C	Galaxy 10	10 lbs.	18-¼ lbs.	5-⅛"	21"	7-¾"	.65 cu.ft.	40-B:C	MB846C
FG20C	Galaxy 20	20 lbs.	38 lbs.	7-½"	21-¼"	8-¾"	1.0 cu.ft.	120-B:C	MB811C
FK15C	Saturn 15	1.8 gal.	22-½ lbs.	7"	19-¼"	9"	.9 cu.ft.	2-A:K	MB810C
FK25C	Saturn 25	2.5 gal.	33-½ lbs .	7"	24-½"	9"	1.1 cu.ft.		
FM02C	Mercury 2.5*	2-½ lbs.	5-¼ lbs.	3-⅜"	15-½"	6-⅜"	.25 cu.ft.	2-B:C	MB817C
FM05C	Mercury 5*	5 lbs.	9-½ lbs.	4-¼"	16-⅜"	7-¼"	.3 cu.ft.	5-B:C	MB818C
FM11C	Mercury 11	11 lbs.	21-¼ lbs.	7"	17-½"	8-⅝"	1.0 cu.ft.	1-A:10-B:C	MB810C
FM15C	Mercury 15	15 lbs.	25-¾ lbs	7"	17-1⁄2"	8-5⁄8"	1.0 cu.ft.	2A-10B:C	MB810C
FS05C	Sentinel 5	5 lbs.	14 lbs.	5-¼"	17-¾"	8-¼"	.65 cu.ft.	5-B:C	MB809C
FS10C	Sentinel 10	10 lbs.	28-¼ lbs.	7"	24"	12"	1.3 cu.ft.	10-B:C	MB810C
FS15C	Sentinel 15	15 lbs.	37-¾ lbs.	7"	30"	12"	1.0 cu.ft.	10-B:C	MB810C
FS20C	Sentinel 20	20 lbs.	50-¾ lbs.	8"	30"	13"	2.1 cu.ft.	10-B:C	MB811C
FE270A	Nebula 270	1-¾ gal.	7 lbs.	7"	19"	9"	1.1 cu. ft.	2-A:C	MB810NM
FE272A	Nebula 272	2-½ gal.	8 lbs.	7"	24-½"	9"	1.3 cu ft.		MB810NM
FWM250C	Nebula 250	2-½ gal.	8.3 lbs.	7"	28"	14"	1.3 cu ft.		-
FP02C	Grenadier	2-½ gal.	7-¾ lbs.	7"	24-½"	9	1.1 cu.ft.	2A	MB810

*Indicates mounting bracket standard. J Hook wall bracket standard with all other extinguishers.
NOTE: JL Extinguishers are shipped fully charged with the exception of the Nebula & Grenadier. NFPA regulations also require extinguishers to be inspected when initially placed in service and all local fire code and all local fire code and tagging requirements must be adhered to. All fire extinguisher sizes are nominal. Contact customer service for more information about ordering tagged extinguishers in your area.

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



PURPLE K EXTINGUISHERS: CLASS BC DRY CHEMICAL FIRE EXTINGUISHER

High performance extinguishing agent most effective for dealing with flammable liquid fires.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Upright squeeze grip operation. Temperature range -65°F (-52°C) to 120°F (49°C)

Construction: Heavy-duty steel cylinder with rugged metal valve and siphon tube with replaceable molded valve stem seal, visual pressure gauge, pull pin and upright squeeze grip. Corrosion and impact-resistant powder coat finish



ORBIT LOW PROFILE EXTINGUISHERS: MULTI-PURPOSE ABC OR PURPLE K

Available for wall mount in both Multi-Purpose ABC or Purple K (FE10VB & FPK10VB) or available in cabinet mount version with Multi-Purpose ABC (FE10V). See JL's low profile 2100 series cabinet on pg. 11.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Temperature range from -40°F to +120°F

Construction: Corrosion resistant, powder coated, tempered aluminum vessel with aluminum valve and siphon tube. Visual pressure gauge, stainless steel pull pin, handles, bracket and button hook



WHEELED EXTINGUISHERS: MULTI-PURPOSE AND REGULAR DRY CHEMICAL

Available in three size capacities with two choices of extinguishing agent and three different operational design configurations, the best match for your hazard protection needs can be accurately selected, maximizing the fire safety of your operation. Easily transportable through doorways and over rough terrain.

Typical Uses: Offshore rigs, ship docks, refineries, chemical plants, aircraft ramps, processing plants, storage and loading areas

Construction: Cylinders with chrome-plated brass valve assemblies manufactured to DOT specification 4BW240. Highly visible pressure-indicating gauge. Cylinders and carriages are shot blasted, primed and coated with powder coat finish that exceeds Underwriter's Laboratories 240 hour salt spray requirements. All units are equipped with all weather semi-pneumatic 12.3 inch diameter, 3.5 inch wide tires that allows for easy movability through narrow doors and walkways by a single operator. Built to ANSI/UL 299 and 711 standards

Other Extinguishant Types: Carbon Dioxide and Halotron™ wheeled units also available. See website for more information



FIRE EXTINGUISHER STAND:

A plastic fire extinguisher stand that is ideal for temporary use on construction sites.

Typical Uses: Ideal for temporary use on construction sites

Construction: Designed to hold all sizes of portable fire extinguishers from 5-20 pounds. Stackable with water drain holes, a flag insert hole and handle cutouts for easy maneuverability

Material: Polypropylene, red



MB809C



MB810C



MB811C



MB818C



MB846C



MB817C



J-HOOK FE05C



J-HOOK FE10C



J-HOOK FE20C

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

MODEL	DESCRIPTION	NOMINAL CAPACITY	SHIPPING WEIGHT	CYLINDER DIAMETER	OVERALL HEIGHT	OVERALL WIDTH	SHIPPING VOLUME	U/L RATING	OPTIONAL MOUNTING BRACKET
FPK02C*	Purple K 2-1/2	2 -½ lbs.	5-½ lbs.	3-⅜"	14-¾"	4-⅞"	.14 cu. ft.	10B:C	MB817C
FPK05C	Purple K 5	5 lbs.	10 lbs.	4-¼"	16-⅜"	7-¼"	.29 cu. ft.	20B:C	MB818C
FPK10C	Purple K 10	10 lbs.	18-1/4 lbs.	5-⅛"	21"	7-¾"	.5 cu. ft.	80B:C	MB846C
FPK20C	Purple K 20	20 lbs.	33-½ lbs.	7-½"	21-¼"	8-¾"	.81 cu. ft.	120B:C	MB811C
FE10V	Orbit ABC 10*	10 lbs.	28-½ lbs.	3" x 10"	22"	11"	1.35 cu. ft.	4-A:80-B:C	Button Hook Incl. for Wall/Cabinet
FE10VB	Orbit ABC 10	10 lbs.	26-½ lbs.	3-½" x 8"	23"	9"	1.35 cu. ft.	4-A:80-B:C	Wall Mount Button Hook Incl.
FPK10VB	Orbit Purple K 10	10 lbs.	26.6 lbs.	3-½" x 8"	23"	9"	1.35 cu. ft.	80-B:C	Wall Mount Button Hook Incl.

*Indicates mounting bracket standard. J Hook wall bracket standard with all other extinguishers.
NOTE: JL Extinguishers are shipped fully charged with the exception of the Grenadier & Nebula. NFPA regulations also require extinguishers to be inspected when initially placed in service and all local fire code and all local fire code and tagging requirements must be adhered to. All fire extinguisher sizes are nominal. Contact customer service for more information about ordering tagged extinguishers in your area.

MODEL	DESCRIPTION	NOMINAL CAPACITY	SHIPPING WEIGHT	OVERALL HEIGHT	OVERALL WIDTH	OVERALL DEPTH	HOSE LENGTH & DIAMETER	U/L RATING	WHEEL TYPE	WHEEL DIA. *in inches*
FE50C	Wheeled Cosmic 50	50 lbs.	154 lbs.	47"	24"	26.5"	25 ft. x .50 in.	10-A:160-B:C	Rubber	12.3 x 3.5
8FW30110	Wheeled Cosmic 125	125 lbs.	300 lbs.	51"	26"	38"	50 ft. x .75 in.	30-A:240-B:C	Rubber	16 x 4
8FW32120	Wheeled Cosmic 300	300 lbs.	780 lbs.	58"	36"	48"	50 ft. x 1 in.	30-A:320-B:C	Steel	36 x 6
8FW31250	Wheeled Galaxy 150	150 lbs.	459 lbs.	55"	32"	46"	50 ft. x .75 in.	240-B:C	Steel w/Rubber Tread	36 x 2.5
8FW32240	Wheeled Galaxy 350	350 lbs.	856 lbs.	58"	36"	48"	50 ft. x 1 in.	320-B:C	Steel w/Rubber Tread	36 x 6

MODEL	DESCRIPTION	SHIPPING WEIGHT	HEIGHT	WIDTH	LENGTH	MATERIAL	COMPATABILITY
FES5	Plastic Fire Extinguisher Stand	10lbs	34"	20-⅞"	20-⅞"	Polypropylene	5-20 lbs. FEs

FIRE EXTINGUISHER BRACKETS AND J-HOOKS

MODEL	DESCRIPTION	OPTIONAL FOR FIRE EXTINGUISHER MODEL
MB809C	Black, Steel, Heavy-Duty	Sentinel (FS05C)
MB810C	Black, Steel, Heavy-Duty	Mercury (FM11C) & (FM15C), Saturn (FK15C) & (FK25C), Sentinel (FS10C) & (FS15C), Grenadier (FP02C)
MB811C	Black, Steel, Heavy-Duty	Cosmic (FE20C) & (FE20CBV), Galaxy (FG20C), Sentinel (FS20C), Purple K (FPK20C) & (FPK20CBV) & (FPK30CBV)
MB818C	Red, Steel, Vehicle	Cosmic (FE05C) & (FE05CBV), Mercury (FM05C), Galaxy (FG055C), Purple K (FPK05C)
MB846C	Red, Steel, Vehicle	Cosmic (FE10C) & (FE10CBV), Galaxy (FG10C), Purple K (FPK10C)
MB817C	Red, Steel, Vehicle	Cosmic (FE05C) & (FE05CBV), Mercury (FM05C), Galaxy (FG055C), Purple K (FPK05C)
J-HOOK FE05C	Steel, Wall-Hook	Cosmic 2.5 (FE02C) & 5 (FE05C), Purple K 2.5 (FPK02C) & 5 (FPK05C), Galaxy 2.5 (FG02C) & 5.5 (FG055C), Mercury 2.5 (FM02C) & 5 (FM05C)
J-HOOK FE10C	Steel, Wall-Hook	Cosmic 10 (FE10C), Purple K 10 (FPK10C), Galaxy 10 (FG10C), Sentinel 5 (FS05C)
J-HOOK FE20C	Steel, Wall-Hook	Cosmic 20 (FE20C), Purple K 20 (FPK20C) & 30 (FPK30BCV), Galaxy 20 (FG20C), Sentinel 10 (FS10C) & 15 (FS15C, Mercury 11 (FM11C) & 15 (FM15C)

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

The Architectural cabinets feature multiple options for tub sizes, materials, trim projections, door styles, glazing and more.



1017F10



1013F10

AMBASSADOR SERIES: STEEL

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Trim & Door Material: Cold rolled steel
Tub Material: Cold rolled steel
Finish: White powder coat

ADDITIONAL OPTIONS

Powder Coat Finishes: Several other colors to select from



1097V10
with Optional Dark Bronze Anodized



1027V10

ACADEMY SERIES: ALUMINUM

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Trim & Door Material: Clear anodized aluminum
Tub Material: White powder coated cold rolled steel. Surface mount models are clear anodized aluminum
Door & Trim Finish: Clear anodized

ADDITIONAL OPTIONS

Optional Materials: .040" aluminum Tub (Non-Rated Use)
Optional Finishes: .050" dark bronze anodized



1036F16 with Optional Polished #7



1035S21

COSMOPOLITAN SERIES: STAINLESS STEEL

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Trim & Door Material: 304 stainless steel #4
Tub Material: White powder coated cold rolled steel. Surface mount models have 304 stainless steel

ADDITIONAL OPTIONS

Optional Finishes: #6 stainless



1036C70
with Optional Cosmic 10E



1012P48A
Rec Hndl standard

PANORAMA SERIES: FRAMELESS ACRYLIC DOOR

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

A frameless door of clear polycarbonate or textured acrylic. Textured models available in 3 background colors with choice of lettering.
Trim Material: Cold rolled steel, stainless steel, aluminum
Tub Material: White powder coated cold rolled steel. Tubs are stainless steel and aluminum for surface mount models that are the same material as trim

SEE PAGES 10-11 FOR DIAGRAM OF CABINET DIMENSIONS AND EXAMPLE OF PROFILES
SEE PAGE 16 TO VIEW DOOR STYLES

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

AMBASSADOR, ACADEMY, COSMOPOLITAN AND PANORAMA

COMPATIBLE EXTINGUISHERS	STEEL	ALUMINUM	STAINLESS STEEL	TRIM PROJECTION	TUB I.D. A (W)	TUB I.D. B (H)	TUB I.D. C (D)	TRIM O.D. E	TRIM O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] WIDTH	WALL OPENING: NON-RATED [FIRE-RATED] HEIGHT	WALL OPENING: NON-RATED [FIRE-RATED] DEPTH
Cosmic, Galaxy 2.5-6 (mount 6 lb to tub) Mercury 2.5-5	8114W	8124W†	8134W†	Trimless 5/8" Drywall‡	9"	18"	5-½"	-	-	10" [11-5/16"]	19" [20-5/16"]	5-⅝" [6-3/16"]
	8115	8125	8135	3/8" Flat Trim				12-⅜"	21-⅜"			5-⅜" [6-7/16"]
	8116	8126	8136	1-½" Square								4-⅛" [5-3/16"]
	8117	8127	8137	2-½" Rolled								3-⅛"* [4"]*
	8113	8123	8133	Surface Mount Sq.	12-3/16"	21-3/16"	6"			-	-	-
Cosmic, Galaxy Mercury 2.5 & 5	1710†	1720†	1730†	2-¼" Square	10-½"	24"	5"	13-⅞"	27-⅜"	11-½" [12-13/16"]	25" [26-5/16"]	3" [4"]
Cosmic, Galaxy 2.5-6 (Mount 6lb to tub) Mercury 2.5-5	1815	1825	1835	3/8" Flat Trim			5-½"					5-⅜" [6-7/16"]
	1816	1826	1836	1-½" Square								4-⅛" [5-3/16"]
	1817	1827	1837	3" Rolled								2-⅝" [3-11/16"]
	1812	1822	1832	4" Rolled, Rec Hndl								1-⅞"* [2-⅞"]*
	1818	1828	1838	4-½" Rolled								1-⅛"* [2-3/16"]*
Cosmic, Galaxy 2.5-10 Mercury 2.5-5 Sentinel 5	1014W	1024W†	1034W†	Trimless 5/8" Drywall‡	10-½"	24"	6"	-	-	11-½" [12-13/16"]	25" [26-5/16"]	6-⅛" [6-11/16"]
	1015	1025	1035	3/8" Flat Trim				13-⅞"	27-⅜"			5-⅞" [6-15/16"]
	1016	1026	1036	1-½" Square								4-⅝" [5-11/16"]
	1017	1027	1037	3" Rolled								3-⅛" [4"]
	1012	1022	1032	4" Rolled, Rec Hndl								2-⅜"* [3-⅜"]*
	1018	1028	1038	4-½" Rolled								1-⅝"* [2-11/16"]*
	1013	1023	1033	Surface Mount Sq.	13-11/16"	27-3/16"	6-½"			-	-	-
Cosmic, Galaxy (mount 20 lb to tub) Mercury 2.5-15 (mount 15.5 lb to tub) Sentinel 5-10 (mount 10 lb to tub) Grenadier, Saturn, Nebula 270, 272	2014W	2024W†	2034W†	Trimless 5/8" Drywall‡	12"	27"	7-¾"	-	-	13" [14-5/16"]	28" [29-5/16"]	7-⅞" [8-7/16"]
	2015	2025	2035	3/8" Flat Trim				15-⅜"	30-⅜"			7-⅝" [8-11/16"]
	2016	2026	2036	1-¼" Square								6-⅝" [7-11/16"]
	2017	2027	2037	2-½" Rolled								5-⅜"* [6-7/16"]*
	2012	2022	2032	4" Rolled, Rec Hndl								4-⅛"* [5-⅛"]*
	2018	2028	2038	4-½" Rolled								3-⅜"* [4-7/16"]*
	2013	2023	2033	Surface Mount Sq.	15-3/16"	30-3/16"	8"			-	-	-
Cosmic, Galaxy (mount 20 lb to tub) Mercury 2.5 - 15 (mount 15.5 lb to tub) Sentinel 5 - 15 (mount 10 lb to tub) Grenadier, Saturn, Nebula 270-272	3015	3025	3035	3/8" Flat Trim	16"	32"	7-¾"	19-⅜"	35-⅜"	17" [18-5/16"]	33" [34-5/16"]	7-⅝" [8-11/16"]
	3016	3026	3036	1-¼" Square								6-⅝" [7-11/16"]
	3017	3027	3037	2-½" Rolled								5-⅜"* [6-7/16"]*
	3012	3022	3032	4" Rolled, Rec Hndl								4-⅛"* [5-⅛"]*
	3018	3028	3038	4-½" Rolled								3-⅜"* [4-7/16"]*
	3013	3023	3033	Surface Mount Sq.	19-3/16"	35-3/16"	8"			-	-	-
Two each of: Cosmic, Galaxy (FE20C) (mount 20 lb to tub) Mercury 2.5- 5.5 Sentinel 5 Grenadier	4015	4025	4035	3/8" Flat Trim	20"	27"	7-¾"	23-⅜"	30-⅜"	21" [22-5/16"]	28" [29-5/16"]	7-⅝" [8-11/16"]
	4016	4026	4036	1-¼" Square								6-⅝" [7-11/16"]
	4017	4027	4037	2-½" Rolled								5-⅜"* [6-7/16"]*
	4012	4022	4032	4" Rolled, Rec Hndl								4-⅛"* [5-⅛"]*
	4018	4028	4038	4-½" Rolled								3-⅜"* [4-7/16"]*
	4013	4023	4033	Surface Mount Sq.	23-3/16"	30-3/16"	8"			-	-	-

*Add 5/8" wall depth for cabinets with aluminum frames.
† Panorama Style Doors Not Available ‡ Trimless models may be installed before drywall - See submittal and installation instructions for more information.

SEE PAGES 10-11 FOR DIAGRAM OF CABINET DIMENSIONS AND EXAMPLE OF PROFILES
SEE PAGE 16 TO VIEW DOOR STYLES

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



1057S21
US3 Polished Brass



1045V10
US10 Satin Bronze

CAVALIER SERIES: BRONZE OR BRASS

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Select the beauty and lustrous finishes of bronze or brass to add that upscale look to your next project.

Trim & Door Material: Bronze or brass

Trim & Door Finish: US10 Satin bronze, US3 polished brass

Tub Material: Cold rolled steel with white powder coat. Surface mount models match trim material

Door Pulls: Material matches finish of cabinet



1535G25



1515F25

CLEAR VU SERIES: ACRYLIC BUBBLE

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

An attractive bubble cabinet for one or two fire extinguishers with five material options to match the decor.

Trim & Door Material: Cold rolled steel, 304 stainless steel, aluminum, bronze or brass

Finish: White powder coat, #4 stainless, clear anodized aluminum, US10 satin bronze or US3 polished brass


Bubble: Acrylic bubble allows 180° extinguisher visibility. 2-½" projection for 1500 Series, 3-½" projection for 2500 and 4500 series

Tub: Constructed of cold rolled steel with white powder coat finish. Surface mount cabinets match trim material. Extinguisher must be mounted to back of tub using J-hook

CABINET PROFILES - AMBASSADOR, ACADEMY, COSMOPOLITAN, PANORAMA, CAVALIER

TRIM STYLE & PROJECTION

RECESSED	SEMI-RECESSED					SURFACE-MOUNT	
3/8" Flat Square	1-¼" or 1-½" Square	2-¼" Square	2-½" or 3" Rolled	4" Rolled w/ Rec. Hndl	4-½" Rolled	5" to 10-½" Square	5" to 10-½" Rolled

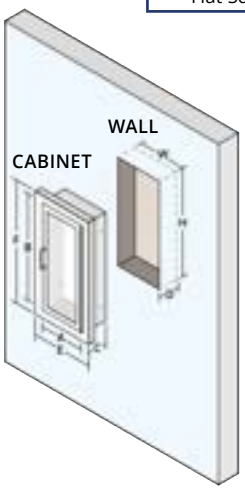

HANDLE LOCATIONS

	Standard Pull	Recessed Handle		Standard Pull	Recessed Handle
NO LOCK	CENTERED	CENTERED	SAF-T-LOK	3-½" CENTERED	CENTERED

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

CAVALIER


COMPATIBLE EXTINGUISHERS	US10 SATIN BRONZE	US3 POLISHED BRASS	TRIM PROJECTION	TUB I.D. A (W)	TUB I.D. B (H)	TUB I.D. C (D)	TRIM O.D. E	TRIM O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] WIDTH	WALL OPENING: NON-RATED [FIRE-RATED] HEIGHT	WALL OPENING: NON-RATED [FIRE-RATED] DEPTH
Cosmic, Galaxy 2.5-6 (Mount 6 lb to tub) Mercury 2.5-5	**1845**	**1855**	3/8" Flat Trim	10-½"	24"	5-½"	13-⅞"	27-⅜"	11-½" [12-13/16"]	25" [26-5/16"]	5-⅜" [6-7/16"]
	1846	**1856**	1-½" Square								4-⅛" [5-3/16"]
	1847	**1857**	3" Rolled								2-⅝" [3-⅝"]
Cosmic, Galaxy 2.5-10 (Mount 20 lb to tub) Mercury 2.5-15 (Mount 15 lb to tub) Sentinel 5-10	**1045**	**1055**	3/8" Flat Trim	10-½"	24"	6"	13-⅞"	27-⅜"	11-½" [12-13/16"]	25" [26-5/16"]	5-⅞" [6-15/16"]
	1046	**1056**	1-½" Square								4-⅝" [5-11/16"]
	1047	**1057**	3" Rolled								3-⅛" [4"]
	1043	1053	Surface Mount	13-11/16"	27-3/16"	6-½"			-	-	-
Cosmic, Galaxy (Mount 20 lb to tub) Mercury 2.5-15 (Mount 15.5 lb to tub) Sentinel 5-10 Grenadier, Saturn Nebula 270, 272	**2045**	**2055**	3/8" Flat Trim	12"	27"	7-¾"	15-⅜"	30-⅜"	13" [14-5/16"]	28" [29-5/16"]	7-⅝" [8-11/16"]
	2046	**2056**	1-¼" Square								6-⅝" [7-11/16"]
	2043	2053	Surface Mount	15-3/16"	30-3/16"	8"	15-⅜"	30-⅜"	-	-	-

CLEAR VU

COMPATIBLE EXTINGUISHERS	STEEL	ALUMINUM*	STAINLESS STEEL	TRIM PROJECTION	TUB I.D. A (W)	TUB I.D. B (H)	TUB I.D. C (D)	TRIM O.D. E	TRIM O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] WIDTH	WALL OPENING: NON-RATED [FIRE-RATED] HEIGHT	WALL OPENING: NON-RATED [FIRE-RATED] DEPTH
Cosmic, Galaxy 2.5-10 Mercury 2.5-5 Sentinel 5	**1515**	**1525**	**1535**	Flat Trim	10-½"	24"	4"	13-⅞"	27-⅜"	11-½" [12-13/16"]	25" [26-5/16"]	3-⅞" [4-15/16"]
	1516	**1526**	**1536**	1-½" Square								2-⅝" [3-11/16"]
	1517	1527	1537	3" Rolled								1-⅛" [2-3/16"]
	1513	1523	1533	Surf. Mtd.	13-11/16"	27-3/16"	4-½"	13-⅞"	27-⅜"	-	-	-
Cosmic 2.5-10, FE20A Galaxy 2.5-10 Mercury, Saturn, Grenadier Sentinel 5-10 Nebula 270	**2515**	**2525**	**2535**	Flat Trim	14"	30"	4"	17-⅜"	33-⅜"	15" [16-5/16"]	31" [32-5/16"]	3-⅞" [4-15/16"]
	2516	**2526**	**2536**	1-¼" Square								2-⅞" [3-15/16"]
	2517	2527*	2537	2-½" Rolled								1-⅝"* [2-1/16"]*
	2513	2523	2533	Surf. Mtd.	17-3/16"	33-3/16"	4-½"	17-⅜"	33-⅜"	-	-	-
Two of each: Any Cosmic & Galaxy, Mercury, Saturn, or Grenadier P Sentinel 5-15 Nebula 250-272	**4515**	**4525**	**4535**	Flat Trim Double Door	28"	30"	4"	31-⅜"	33-⅜"	29"	31"	3-⅞"
	4513	4523	4533	Surf. Mtd. Double Door	31-3/16"	33-3/16"	4-½"	31-⅜"	33-⅜"	-	-	-

All fire extinguishers must be mounted to the back of the tub with a J-hook
*Add 5/8" to wall depth for a cabinet with an aluminum frame. 4500 series consist of a double door design.

TRIM PROJECTION CLEAR VU



3/8" Flat Square	1-¼" or 1-½" Square	2-¼" Square	2-½" or 3" Rolled	4" to 4-½" Square	4" to 4-½" Rolled



Clear Vu - 1535G27, 1527F25, 1513F25, 1535G26

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



5624W10 5644S21

EMBASSY SERIES: DECORATIVE TRIMLESS RECESSED

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Recessed Embassy cabinets are always ADA-compliant; are offered in five attractive materials and several door styles. Embassy cabinets are available for fire extinguishers and valve and hose cabinets.

Door Construction: Cabinet doors are available cold rolled steel, 304 stainless steel, aluminum. Doors feature two concealed hinges, concealed handle and roller catch or standard pull handle if Saf-T-Lok is installed

Door Finish: White powder coat finish, stainless steel #4, clear anodized aluminum

Tub: Constructed of cold rolled steel with white powder coat finish



2115G10 2119G10A

ORBIT SERIES: LOW PROFILE FOR ORBIT EXTINGUISHERS

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Trim & Door Finish: White powder coat finish, stainless steel #4, clear anodized aluminum

Tub: Constructed of cold rolled steel with white powder coat finish. Tub fits only the Orbit model FE10V extinguisher



9519S21 Roller



3616F10 Combination



9613S21 Drop

ROYAL SERIES: FIRE BLANKET CABINETS

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Combination Extinguisher & Blanket Cabinet: Designed to hold a fire extinguisher below and a fire blanket (included) on top of shelf

Material and Finish: Steel with white powder coat, aluminum anodized, 304 stainless steel #4

Door Styles: Full view, vertical duo, and more (see page 16)

Blanket: 62" x 80" x 2.75 lb., processed 70% wool/30% synthetic fire blanket that meet the Code of Federal Regulation 16 CFR Part 1610 Standard for Flammability of Clothing Textiles (PN: 077-2)

Roller Blanket Cabinet: A steel roller type blanket cabinet for emergency use. The included blanket is attached to the vertical roller and comes with arm loops to enable a person to wrap themselves in a blanket in one continuous motion

Drop Blanket Cabinet: A steel "drop" blanket cabinet includes folded blanket. Handle is pulled down to open the bottom mounted door, which then releases the blanket to drop out

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

EMBASSY

COMPATIBLE EXTINGUISHERS FD VALVES & HOSE RACKS	STEEL	ALUMINUM	STAINLESS STEEL	TUB I.D. A (W)	TUB I.D. B (H)	TUB I.D. C (D)	DOOR O.D. E	DOOR O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] WIDTH	WALL OPENING: NON-RATED [FIRE-RATED] HEIGHT	WALL OPENING: NON-RATED [FIRE-RATED] DEPTH
Cosmic 2.5-10, Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5	**5614**	**5624**	**5634**	10-½"	24"	5-¾"	12-11/16" [13-15/16"]	26-¼" [27-½"]	11-½" [12-13/16"]	25" [26-5/16"]	5-⅞" [6-15/16"]
Cosmic, Galaxy**, Mercury, Saturn, Grenadier, Sentinel 5-15, Nebula 250-272**	**5714**	**5724**	**5734**	16"	32"	7-¾"	18-¼" [19-7/16"]	34-¼" [35-½"]	17" [18-5/16"]	33" [34-5/16"]	7-⅞" [8-15/16"]
FIRE DEPARTMENT VALVE, HOSE & EXTINGUISHER CABINETS											
Valve: KOs 1-½" & 2-½", 1 centered, each side of tub Fire Department Valve †	**5514**	**5524**	**5534**	18"	18"	7-¾"	20-3/16" [27-7/16"]	20-¼" [21-½"]	19" [20-5/16"]	19" [20-5/16"]	7-⅞" [8-15/16"]
Combination Valve & Hose: KOs 1-½" & 2-½"; Fire Department Valve & Extinguisher: Any Cosmic, Galaxy, Mercury, Saturn, Nebula 250-272 or Grenadier P, Sentinel 5 lb - 15 lb †	**5814**	**5824**	**5834**	32"	32"	7-¾"	34-3/16" [35-7/16"]	34-¼" [35-½"]	33" [34-5/16"]	33" [34-5/16"]	7-⅞" [8-15/16"]
Combination Valve & Extinguisher: KOs 1-½" & 2-½"; Fire Department Valve & Extinguisher: any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 lb - 20 lb, Nebula 250-272 †	**5914**	**5924**	**5934**	16"	40"	8-¾"	18-3/16" [19-7/16"]	42-¼" [43-½"]	17" [18-5/16"]	41" [42-5/16"]	8-⅞" [9-15/16"]

**Cosmic 20 & Galaxy 20 extinguisher must be mounted on the back of the cabinet tub.
† Knockouts not available on Fire-Rated Cabinets

ORBIT

COMPATIBLE EXTINGUISHER	STEEL	ALUMINUM	STAINLESS STEEL	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	TRIM O.D. E	TRIM O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] W	WALL OPENING: NON-RATED [FIRE-RATED] H	WALL OPENING: NON-RATED [FIRE-RATED] D
Orbit FE10V	**2115**	**2125**	**2135**	3/8" Flat Trim	12"	27"	3-⅛"	15-⅜"	30-⅜"	13" [14-5/16"]	28" [29-5/16"]	3-¼" [4"]
	2119	-	**2139**	Surface Mount, Rec Hndl	15-¼"	30-¼"	3-11/16"	15-⅜"	30-⅜"	-	-	-

ROYAL

BLANKET & COMPATIBLE EXTINGUISHERS	STEEL	ALUMINUM	STAINLESS	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	TRIM O.D. E	TRIM O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] W	WALL OPENING: NON-RATED [FIRE-RATED] H	WALL OPENING: NON-RATED [FIRE-RATED] D
Any Cosmic & Galaxy Mercury, Saturn or Grenadier Sentinel 5-15 Nebula 270	**3615**	**3625**	**3635**	Flat Trim	12"	36"	8"	15-⅜"	39-⅜"	13" [14-5/16"]	37" [38-5/16"]	7-⅞" [8-15/16"]
	3616	**3626**	**3636**	1-¼" Square								6-⅞" [7-15/16"]
	3617	**3627***	**3637**	2-½" Rolled								5-5/8"* [6-11/16"]*
	3612	**3622***	**3632**	4" Rolled, Rec Hndl								4-⅜"* [5-⅜"]*
	3618	3628*	3638	4-½" Rolled								3-5/8"* [4-11/16"]*
	3613	3623	3633	Surface Mounted	15-3/16"	39-3/16"	8-½"	15-⅜"	39-⅜"	-	-	-
Roller Blanket	9519S21	-	-	Surface Mounted	6-½"	68"	4-½"	6-9/16"	68-¼"	-	-	- -
Drop Blanket	9613S21	-	-	Surface Mounted	16"	10"	7-½"	16-⅛"	10-¼"	-	-	- -

*Add 5/8" wall depth for cabinets with aluminum frames.

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



8515F10

CROWNLINE 6000-7200 SERIES: FD VALVES/HOSES/EXTINGUISHERS

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Trim & Door Material: Cold rolled steel, 304 stainless steel or aluminum
Finish: White powder coat, #4 stainless, clear anodized aluminum
Tub: White powder coated cold rolled steel. Surface mount models are same material as door & trim
Knockouts: Hose and valve cabinets include dual knockouts for 1-1/2" and 2-1/2" diameter pipe located each side of tub, except for surface-mount and fire-rated, that are by others during installation
Trim Style and Depth: Rolled edge aluminum trim is formed of extrusions. Surface mount steel and aluminum have square edge, stainless models have rolled edge

RECOMMENDED HOSE RACK, VALVE, AND EXTINGUISHERS	STEEL	ALUMINUM	STAINLESS STEEL	TRIM PROJECTION	TUB I.D. A (W)	TUB I.D. B (H)	TUB I.D. C (D)	TRIM O.D. E	TRIM O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] WIDTH	WALL OPENING: NON-RATED [FIRE-RATED] HEIGHT	WALL OPENING: NON-RATED [FIRE-RATED] DEPTH
Combination Hose & FE: KOs fit 1-½", Hose Rack Unit with 50' or 75' Hose (HRA:050B, 050CH, 075B, 075CH) & Cosmic 2.5lb or Galaxy 2.5lb - 5lb Extinguisher	6014W	6024W	6034W	Trimless 5/8" Drywall‡	24"	30"	6"	-	-	25" [26-5/16"]	31" [32-5/16"]	6-1/8" [6-1 1/16"]
	6015	6025	6035	3/8" Flat Square				27-3/8"	33-3/8"			5-7/8" [6-15/16"]
	6016	6026	6036	1-1/4" Square								4-7/8" [5-15/16"]
	6017	6027	6037	2-½" Rolled								3-5/8"* [4-1 1/16"]*
	6013	6023	6039**	Surface Mount	27-3/16"	33-3/16"	6-½"			-	-	-
Combination Hose & FE: KOs 1-1/2" & 2-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & 2.5lb or Galaxy 2.5lb - 5lb Extinguisher	6114W	6124W	6134W	Trimless 5/8" Drywall‡	24"	30"	8"	-	-	25" [26-5/16"]	31" [32-5/16"]	8-1/8" [8-1 1/16"]
	6115	6125	6135	3/8" Flat Square				27-3/8"	33-3/8"			7-7/8" [8-15/16"]
	6116	6126	6136	1-1/4" Square								6-7/8" [7-15/16"]
	6117	6127	6137	2-½" Rolled								5-5/8"* [6-1 1/16"]*
	6113	6123	6139**	Surface Mount	27-3/16"	33-3/16"	8-½"			-	-	-
Combination Hose & FE: KOs fit 1-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & Cosmic 2.5lb or Galaxy 2.5lb - 5lb Extinguisher	6214W	6224W	6234W	Trimless 5/8" Drywall‡	24"	34-3/4"	6"	-	-	25" [26-5/16"]	35-3/4" [37-1/16"]	6-1/8" [6-1 1/16"]
	6215	6225	6235	3/8" Flat Square				27-3/8"	38-1/8"			5-7/8" [6-15/16"]
	6216	6226	6236	1-1/4" Square								4-7/8" [5-15/16"]
	6217	6227	6237	2-½" Rolled								3-5/8"* [4-1 1/16"]*
	6213	6223	6239**	Surface Mount	27-3/16"	37-15/16"	6-½"			-	-	-
Hose: KOs 1-1/2" & 2-1/2" Hose Rack Unit 100' Hose (HRA100B-2.5)	6414W	6424W	6434W	Trimless 5/8" Drywall‡	24"	34-3/4"	8"	-	-	25" [26-5/16"]	35-3/4" [37-1/16"]	8-1/8" [8-1 1/16"]
	6415	6425	6435	3/8" Flat Square				27-3/8"	38-1/8"			7-7/8" [8-15/16"]
	6416	6426	6436	1-1/4" Square								6-7/8" [7-15/16"]
	6417	6427	6437	2-½" Rolled								5-5/8"* [6-1 1/16"]*
	6413	6423	6439**	Surface Mount	27-3/16"	37-15/16"	8-½"			-	-	-
Hose: KOs 1-1/2" & 2-1/2" Hose Rack Unit 125' Hose (HRA125B-2.5)	6614W	6624W	6634W	Trimless 5/8" Drywall‡	24"	38-3/4"	8"	-	-	25" [26-5/16"]	39-3/4" [41-1/16"]	8-1/8" [8-1 1/16"]
	6615	6625	6635	3/8" Flat Square				27-3/8"	42-1/8"			7-7/8" [8-15/16"]
	6616	6626	6636	1-1/4" Square								6-7/8" [7-15/16"]
	6617	6627	6637	2-½" Rolled								5-5/8"* [6-1 1/16"]*
	6613	6623	6639**	Surface Mount	27-3/16"	41-15/16"	8-½"			-	-	-
Hose & Valve or Hose & Extinguisher: KOs 1-1/2" & 2-1/2", Hose Rack Unit 50' or 75' Hose & Valve or Hose Rack Unit 50' or 75' Hose & Cosmic or Galaxy Extinguisher	6314W	6324W	6334W	Trimless 5/8" Drywall‡	30"	30"	8"	-	-	31" [32-5/16"]	31" [32-5/16"]	8-1/8" [8-1 1/16"]
	6315	6325	6335	3/8" Flat Square				33-3/8"	33-3/8"			7-7/8" [8-15/16"]
	6316	6326	6336	1-1/4" Square								6-7/8" [7-15/16"]
	6317	6327	6337	2-½" Rolled								5-5/8"* [6-1 1/16"]*
	6313	6323	6339**	Surface Mount	33-3/16"	33-3/16"	8-½"			-	-	-
Hose & Valve or Hose & Extinguisher: KOs 1-1/2" & 2-1/2" Hose Rack Unit 100' Hose & Valve or Hose Rack Unit 100' & Cosmic or Galaxy Extinguisher	6514W	6524W	6534W	Trimless 5/8" Drywall‡	32-3/4"	34-3/4"	8"	-	-	33-3/4" [35-1/16"]	35-3/4" [37-1/16"]	8-1/8" [8-1 1/16"]
	6515	6525	6535	3/8" Flat Square				36-1/8"	38-1/8"			7-7/8" [8-15/16"]
	6516	6526	6536	1-1/4" Square								6-7/8" [7-15/16"]
	6517	6527	6537	2-½" Rolled								5-5/8"* [6-1 1/16"]*
	6513	6523	6539**	Surface Mount	35-15/16"	37-15/16"	8-½"			-	-	-
Hose & Valve or Hose & Extinguisher: KOs 1-1/2" & 2-1/2" Hose Rack Unit 125' Hose & Valve or Hose Rack Unit 125' & Cosmic or Galaxy Extinguisher	7214W	7224W	7234W	Trimless 5/8" Drywall‡	32-3/4"	38-3/4"	8"	-	-	33-3/4" [35-1/16"]	39-3/4" [41-1/16"]	8-1/8" [8-1 1/16"]
	7215	7225	7235	3/8" Flat Square				36-1/8"	42-1/8"			7-7/8" [8-15/16"]
	7216	7226	7236	1-1/4" Square								6-7/8" [7-15/16"]
	7217	7227	7237	2-½" Rolled								5-5/8"* [6-1 1/16"]*
	7213	7223	7239**	Surface Mount	35-15/16"	41-15/16"	8-½"			-	-	-

*Add 5/8" wall depth for cabinets with aluminum frames. ‡ Trimless models may be installed before drywall. ** Rolled edge
See submittal and installation instructions for more information and knockout locations.

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

CROWNLINE 8000 SERIES: FD VALVES/HOSES/EXTINGUISHERS

FIRE-FX2 UP TO 2 HR

PRODUCT DETAILS:

Trim & Door Material: Cold rolled steel, 304 stainless steel or aluminum

Finish: White powder coat, #4 stainless, clear anodized aluminum

Tub: White powder coated cold rolled steel. Surface mount models are same material as door & trim

Knockouts: Hose and valve cabinets include dual knockouts for 1-1/2" and 2-1/2" diameter pipe located each side of tub, except for surface-mount and fire-rated, that are by others during installation

Trim Style and Depth: Rolled edge aluminum trim is formed of extrusions. Surface mount steel and aluminum have square edge, stainless models have rolled edge



8516V10

RECOMMENDED HOSE RACK, VALVE, AND EXTINGUISHERS	STEEL	ALUMINUM	STAINLESS STEEL	TRIM PROJECTION	TUB I.D. A (W)	TUB I.D. B (H)	TUB I.D. C (D)	TRIM O.D. E	TRIM O.D. F	WALL OPENING: NON-RATED [FIRE-RATED] WIDTH	WALL OPENING: NON-RATED [FIRE-RATED] HEIGHT	WALL OPENING: NON-RATED [FIRE-RATED] DEPTH
Valve: KOs 1-1/2" & 2-1/2" 1 centered, each side of tub Fire Department Valve	**8514W**	**8524W**	**8534W**	Trimless 5/8" Drywall‡	18"	18"	8"	-	-	19" [20-5/16"]	19" [20-5/16"]	8-1/8" [8-1 1/16"]
	8515	**8525**	**8535**	Flat Trim								7-7/8" [8-15/16"]
	8516	**8526**	**8536**	1-1/4" Square				21-3/8"	21-3/8"			6-7/8" [7-15/16"]
	8517	**8527**	**8537**	2-1/2" Rolled								5-5/8"* [6-1 1/16"]*
	8513	8523	8539**	Surface Mount	21-3/16"	21-3/16"	8-1/2"			-	-	-
	8414W	**8424W**	**8434W**	Trimless 5/8" Drywall‡	18"	18"	10"	-	-	19" [20-5/16"]	19" [20-5/16"]	10-1/8" [10-1 1/16"]
	8415	**8425**	**8435**	Flat Trim								9-7/8" [10-15/16"]
	8416	**8426**	**8436**	1-1/4" Square				21-3/8"	21-3/8"			8-7/8" [9-15/16"]
	8417	**8427**	**8437**	2-1/2" Rolled								7-5/8"* [8-1 1/16"]*
	8413	8423	8439**	Surface Mount	21-3/16"	21-3/16"	10-1/2"			-	-	-
Dual side by side Valve & Extinguisher or 2 Valves: KOs 1-1/2" & 2-1/2" 1 centered, each side of tub Fire Department Valve & Cosmic or Galaxy 2½lb -10lb Fire Extinguisher or 2 Fire Department Valves	**8714W**	**8724W**	**8734W**	Trimless 5/8" Drywall‡	26"	26"	8"	-	-	27" [28-5/16"]	27" [28-5/16"]	8-1/8" [8-1 1/16"]
	8715	**8725**	**8735**	Flat Trim								7-7/8" [8-15/16"]
	8716	**8726**	**8736**	1-1/4" Square				29-3/8"	29-3/8"			6-7/8" [7-15/16"]
	8717	**8727**	**8737**	2-1/2" Rolled								5-5/8"* [6-1 1/16"]*
	8713	8723	8739**	Surface Mount	29-3/16"	29-3/16"	8-1/2"			-	-	-
	8614W	**8624W**	**8634W**	Trimless 5/8" Drywall‡	26"	26"	10"	-	-	27" [28-5/16"]	27" [28-5/16"]	10-1/8" [10-1 1/16"]
	8615	**8625**	**8635**	Flat Trim								9-7/8" [10-15/16"]
	8616	**8626**	**8636**	1-1/4" Square				29-3/8"	29-3/8"			8-7/8" [9-15/16"]
	8617	**8627**	**8637**	2-1/2" Rolled								7-5/8"* [8-1 1/16"]*
	8613	8623	8639**	Surface Mount	29-3/16"	29-3/16"	10-1/2"			-	-	-
Valve & Extinguisher: KOs 1-1/2" & 2-1/2" Fire Department Valve & Cosmic, Galaxy Fire Extinguisher, Mercury, Grenadier, Sentinel 5lb -10lb	**8014W**	**8024W**	**8034W**	Trimless 5/8" Drywall‡	16"	40"	9"	-	-	17" [18-5/16"]	41" [42-5/16"]	9-1/8" [9-1 1/16"]
	8015	**8025**	**8035**	Flat Trim								8-7/8" [9-15/16"]
	8016	**8026**	**8036**	1-1/4" Square				19-3/8"	43-3/8"			7-7/8" [8-15/16"]
	8017	**8027**	**8037**	2-1/2" Rolled								6-5/8"* [7-1 1/16"]*
	8013	8023	8039**	Surface Mount	19-3/16"	43-3/16"	9-1/2"			-	-	-

*Add 5/8" wall depth for cabinets with aluminum frames. ‡ Trimless models may be installed before drywall. ** Rolled edge
See submittal and installation instructions for more information and knockout locations.



6415F10
with Optional Fire Hose



6335G17
with Etched Frosted Glass



6535V10

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

ARCHITECTURAL DOOR STYLES

	Solid	Full Glass	Vertical Duo	Horizontal Duo	Centered Horizontal Duo	Small Window	Textured Panorama	Clear Panorama
Standard Pull	S21 	F 	V 	D 	Option Not Available		P 	C70 
Standard Pull & Saf-T-Lok	L22 	G 	W 	E 	A* 	B 	Q 	C71 
Recessed Pull	S21A 	F_A 	V_A 	D_A 	Option Not Available		P_A 	
Recessed Pull & Saf-T-Lok	L22A 	G_A 	W_A 	E_A 	A_A* 	B_A 	Q_A 	

Other	L24  Solid Cylinder Lock, no handle

Glazing	10 Clear Acrylic 	13 WireShield 	15 Bronze Acrylic 	16 Gray Acrylic 	17 Clear Tempered 	18 Laminated Safety 

ClearVu Glazing	25 Clear Acrylic 	26 Red Acrylic** 	27 Bronze Acrylic 


Panorama P&Q Glazing	40-43 Vertical Lettering 	45-48 Horizontal Lettering 	50-53 Ascending Lettering 

* Crownline Option **Red bubble only available on 15xx bubble cabinets

SEE PAGES 32-35 FOR HANDLES, LOCKS, LETTERING, SIGNAGE & ALARMS

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

ARCHITECTURAL MODEL NUMBERS

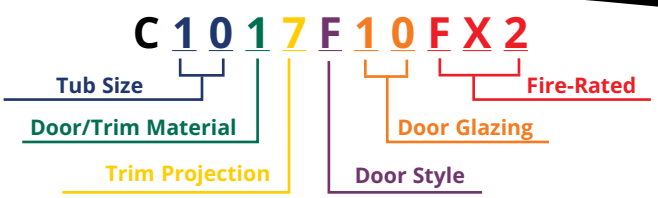

TUB SIZE

Ambassador, Academy, Cosmopolitan, Cavalier, Panorama	
81	9" x 18" x 5-½"
17	10-½" x 24" x 5"
18	10-½" x 24" x 5-½"
10	10-½" x 24" x 6"
20	12" x 27" x 7-¾"
30*	16" x 32" x 7-¾"
40*	20" x 27" x 7-¾"

Clear Vu	
15	10-½" x 24" x 4"
25	14" x 30" x 4"
45*	28" x 30" x 4"

Embassy	
56	10-½" x 24" x 5-¾"
57	16" x 32" x 7-¾"
59	16" x 40" x 8-¾"
55	18" x 18" x 7-¾"
58*	32" x 32" x 7-¾"

Orbit	
21	12" x 27" x 3-¼"

Crownline	
60	24" x 30" x 6"
61	24" x 30" x 8"
62	24" x 34-¾" x 6"
64	24" x 34-¾" x 8"
66	24" x 38-¾" x 8"
63	30" x 30" x 8"
65	32-¾" x 34-¾" x 8"
72	32-¾" x 38-¾" x 8"
85	18" x 18" x 8"
84	18" x 18" x 10"
87	26" x 26" x 8"
86	26" x 26" x 10"
80	16" x 40" x 9"

AED Cabinets	
14	14" x 14" x 6-¾"
19	18" x 18" x 8"
79	14" x 37" x 7"
**see AED submittal	

Royal	
36	12" x 36" x 8"

Note: For surface mount cabinets, add 3 3/16" to width and height measurements. See product page for wall opening dimensions.

DOOR/TRIM MATERIAL

1	Cold Rolled Steel, White powdercoat finish
2	Aluminum, #180 clear satin anodized finish
3	Stainless Steel, #4 satin finish
4	Bronze, US10 satin clear coated finish
5	Brass, US3 polished coated finish
7	Brass, US4 Satin
9	Aluminum, Dark Bronze Anodized

Note: Bronze and brass are not available in 30, 40, 45, or 58 tub sizes

TRIM PROJECTION

2	Semi-Recessed 4"	Rolled edge	With Rec Hndl
3	Surface Mount	Square edge	
4	Trimless recessed flange	Trimless	For 5/8" Drywall or 3/4" Plaster
5	Full recessed 3/8"	Square edge	
6	Semi-recessed 1-¼" or 1-½"	Square edge	
7	Semi-recessed 2-½" or 3"	Rolled edge	
8	Semi-recessed 4-½"	Rolled edge	
9	Surface mount	Rolled edge	

Note: Bronze and brass are not available in #8, 9 or 2 trim depths

DOOR STYLES

STANDARD DOORS

F	Full glazing, pull handle	**G**	Full glazing, pull handle, Saf-T-Lok™
V	Vertical Duo, pull handle†	**W**	Vertical Duo, pull handle†, Saf-T-Lok™
D	Horizontal Duo panel, pull handle	**E**	Horizontal Duo panel, pull handle, Saf-T-Lok™
S21	Solid (no glazing), pull handle†	**L22**	Solid (no glazing), pull handle, Saf-T-Lok™
L24	Solid (no glazing), cylinder lock, no handle	**B10**	Small Acrylic, pull handle, Saf-T-Lok™
		A	Centered Duo panel, pull handle, Saf-T-Lok™

PANORAMA DOORS

P	Colored acrylic, pull handle	**Q**	Colored acrylic, pull handle, Saf-T-Lok™
C70	Framless 3/16" clear polycarbonate, with pull handle	**C71**	Framless 3/16" clear polycarbonate, with pull handle & Saf-T-Lok™

DOOR GLAZING

FOR STANDARD DOORS

10	0.090" Clear acrylic
13	1/4" Clear wire w/safety film
15	1/8" Bronze acrylic
16	1/8" Gray acrylic
17	1/8" Clear tempered glass
18	1/4" Clear safety glass

FOR PANORAMA Door Style P&Q 3/16" Acrylic

40	Black acrylic with white vertical letters
41	Red acrylic with white vertical letters
42	White acrylic with black vertical letters
43	White acrylic with red vertical letters
45	Black acrylic with white horizontal letters
46	Red acrylic with white horizontal letters
47	White acrylic with black horizontal letters
48	White acrylic with red horizontal letters
50	Black acrylic with white ascending letters
51	Red acrylic with white ascending letters
52	White acrylic with black ascending letters
53	White acrylic with red ascending letters

FOR PANORAMA DOOR STYLE C

70	Clear polycarbonate
71	3/16" Clear polycarbonate with Saf-T-Lok™

FOR CLEAR VU

25	Clear Bubble
26	Red Bubble
27	Bronze Bubble

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



1363D12

FB SERIES: FIBERGLASS CABINET

The FB Series is a durable, surface mount fiberglass cabinet that is resistant to salt air, chemicals, moisture, dust, insects and temperature extremes. Fits up to 20 lb fire extinguishers.

PRODUCT DETAILS:

Construction: Door and tub are UV-resistant fiberglass with high-visibility red finish and 5" x 9" Fire Extinguisher Lettering

Door: Gasketed door with 6" x 9" gasketed view window and corrosion-resistant aluminum handle. All cabinets come standard with a full length stainless steel hinge attached by rivets. Door is tightly latched against the silicone gasket by two stainless steel snap latches

Fire-Rated Option: No

FIRE HOSE EQUIPMENT SERIES

This durable storage cabinet has cold rolled steel or galvanneal steel construction for interior or exterior use. The top is angled with a 3" overhang to shed water.



HECIR



HECIRL
Model With Legs

PRODUCT DETAILS:

Construction: 16 gauge galvanneal or cold rolled steel construction. Both are finished with red powder coat paint and features a shelf and louvers on both sides of cabinet for ventilation. Optional 12" legs

Mount: Available without or with 12" legs

Options: 18" or 24" legs, locking chrome handle (must be ordered with cabinet to integrate rod latching system)

Accessory Decals:

- DFFHl "FIRE HOSE" horizontal 8-3/4"x3-1/2", red letters on black
- 1403 "FIRE HOSE" horizontal 4"x9", red letters on black



HRA

HRA SERIES: FIRE HOSE PIN RACK ASSEMBLY

Pin rack assembly includes a single jacket 1-1/2" hose for one-person operation. This basic unit contains the entire assembly including nozzle and couplings.

PRODUCT DETAILS:

Operation: One-man operation for immediate means of fire control

Ratings: 100 GPM at 65 psi at the nozzle. Hose is FM-approved, industrial fog nozzle, angle valve and pin rack are UL-rated

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

FB

COMPATIBLE EXTINGUISHERS	MODEL	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	TRIM O.D. W	TRIM O.D. H	TRIM O.D. D
Cosmic 2.5-10 & 20E (FE20C) Galaxy 2.5-10 Any Mercury Saturn 15	1353D12	Surface Mount Radius Corners	10-¼"	23-¼"	8-½"	13-¼"	26-⅛"	9-¾"
Any Cosmic Any Galaxy Any Mercury Saturn 15 Sentinel 5-10 Grenadier Nebula 270	1363D12	Surface Mount Radius Corners	12-½"	24-⅛"	9"	15-¾"	27-⅛"	10-¼"
Any Cosmic Any Galaxy Any Mercury Any Saturn Any Sentinel Grenadier	1373D12	Surface Mount Curved Top	16"	33"	12-¾"	19-⅝"	36-⅛"	14"

FIRE HOSE EQUIPMENT MODELS

MODEL	DESCRIPTION	CABINET O.D. W	CABINET O.D. H	CABINET O.D. D
HECIR	Cold rolled steel red	58"	42"	18-1/2"
HECIRL	Cold rolled steel with 12" legs red	58"	54"	18-1/2"
HECIG	Galvanneal steel red	58"	42"	18-1/2"
HECIGL	Galvanneal steel with legs red	58"	54"	18-1/2"

HRA

MODEL	PREV. MODEL	HOSE LENGTH	HOSE DIA.	HOSE TYPE	VALVE SIZE	STORED HOSE HEIGHT	HOSE TOP TO VALVE CTR	RACK WIDTH	OVERALL WIDTH	RACK DEPTH	CLASS OF SERVICE
1-½" HOSE AND 1-½" VALVE BASIC UNIT											
HRA050B	3005	50'	1-½"	Poly Lined Hose	1-½"	23"	3-⅞"	17-⅞"	19-¾"	4-⅛"	II
HRA075B	3007	75'									
HRA100B	3010	100'				25"					
1-½" HOSE AND 1-½" VALVE WITH CHROME PLATED BRASS FITTINGS											
HRA050CH	3105	50'	1-½"	Poly Lined Hose	1-½"	23"	3-⅞"	17-⅞"	19-¾"	4-⅛"	II
HRA075CH	3107	75'									
HRA100CH	3110	100'				25"					
1-½" HOSE AND 2-½" VALVE BASIC UNIT											
HRA050B-2.5	3205	50'	1-½"	Poly Lined Hose	2-½"	23"	4-⅛"	17-⅞"	20-1⁄16"	4-⅛"	II and III
HRA075B-2.5	3207	75'									
HRA100B-2.5	3210	100'				25"					
HRA125B-2.5	3212	125'				28"					

See Crownline Series for Cabinets to fit the HRA Series and other fire hose rack assemblies

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

SECURITY SERIES

FIRE-FX® UP TO 2 HOURS

JL Security and Detention Cabinets for fire extinguishers, fire hoses or fire department valves are constructed to meet maximum security requirements in areas where fire protection is required.



CSF8513 with Optional Detention Deadbolt & Color



CSF2033 with Detention Deadbolt

PRODUCT DETAILS:

Cabinet Material & Finish: Cabinet is fully welded. Door are flush and attached with heavy duty continuous hinge

Construction: Cabinet is fully welded. Doors are flush and attached by a heavy duty continuous hinge. Knockouts provided on non fire-rated valve and hose cabinets

Knockouts: Hose and valve cabinets include dual knockouts for 1-1/2" and 2-1/2" diameter pipe located each side of tub, except for surface-mount and fire-rated, that are by others during installation

Trim Style & Depth: Fully Recessed with flat trim, Semi-recessed with 2-1/2" profile square trim or Surface mount model with square edge. Heavy duty masonry anchors are welded to frame on all recessed cabinets

Locks: Mortise cylinder, mortise deadbolt, detention deadlock or detention slam lock

Options: Other powder coat colors

SCHOOL SERIES

FIRE-FX® UP TO 2 HOURS

JL School Cabinets for fire extinguishers are constructed of heavy duty materials for rough duty applications, and offer a range of durable options.



CS2013F17

PRODUCT DETAILS:

Cabinet Material: 12 gauge cold rolled steel or 14 gauge 304 stainless steel

Trim Style: Flat trim, semi-recessed and surface-mounted. All have a square edge

Door, Tub & Trim Finish: White powder coat paint, #4 stainless steel

Options: Other powder coat colors

LIGATURE RESISTANT GUARDSMAN™ SERIES

FIRE-FX2® UP TO 2 HOURS

JL Industries offers a ligature resistant fire extinguisher cabinet designed for behavioral health and other institutional occupancies where additional safety and security precautions are required. Features include angled trim styles and a lockable solid door with a concealed rod hinge design.



CLSS2035M5 with optional stainless steel tub and mortise green core lock



CL1013M2

PRODUCT DETAILS:

Tub Material & Finish: Steel white powder coat, 22 gauge

Trim Material & Finish: Steel white powder coat, 16 gauge

Trim Projection: 3/16" flat angled, 3" angled, surface-mount angled

Door Material & Finish: Steel white powder coat, 16 gauge

Door Style: Solid

Hinge: Stud rod, opens to 95°

Lock: Mortise cam lock with two keys installed

Options:

- **Material:** 16 gauge stainless steel #4 door/trim
- **Lock:** Cylinder lock with two keys, green core mortise cam lock with control key and lock key
- **Alarms:** Commander alarm
- **Finish:** Red, black, other powder coat colors

SEE PAGE 30 FOR SECURITY LOCKS

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

SECURITY

COMPATIBLE EXTINGUISHER, HOSE & RACK	STEEL	STAINLESS STEEL	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	TRIM O.D. W	TRIM O.D. H	WALL OPENING: NON-RATED [FIRE-RATED] W	WALL OPENING: NON-RATED [FIRE-RATED] H	WALL OPENING: NON-RATED [FIRE-RATED] D
SECURITY FIRE EXTINGUISHER CABINETS											
Cosmic 2.5-10 Galaxy 2.5-10 Mercury 2.5-5	**CSF1015**	**CSF1035**	Flat Trim	10-½"	24"	7"	12-½" [13-½"]	26" [27"]	11-½" [12-½"]	25" [26-½"]	7-½" [8"]
	CSF1010	**CSF1030**	2-½" Sq. Trim								5" [5-½"]
	CSF1013	CSF1033	Surface Mt. Sq.	13"	26-½"	8"	13-⅛"	26-⅝"	-	-	-
Cosmic 2.5-20 Galaxy 2.5-20 Mercury 2.5-15 Saturn 15 Sentinel 5	**CSF2015**	**CSF2035**	Flat Trim	12"	27"	8-½"	14" [15"]	29" [30"]	13" [14"]	28" [29-½"]	9-½" [10"]
	CSF2010	**CSF2030**	2-½" Sq. Trim								6-½" [7-½"]
	CSF2013	CSF2033	Surface Mt. Sq.	14-½"	29-½"	10"	14-⅝"	29-⅝"	-	-	-
SECURITY VALVE CABINETS											
1-½" or 2-½" Fire Department Valve	**CSF8515**	**CSF8535**	Flat Trim	18"	18"	8-½"	20" [21"]	20" [21"]	19" [20"]	19" [20-½"]	9" [9-½"]
	CSF8510	**CSF8530**	2-½" Sq. Trim								6-½" [7"]
	CSF8513	CSF8533	Surface Mt. Sq.	20-½"	20-½"	10"	20-⅝"	20-⅝"	-	-	-

Knockouts two each side. Flat trim is 5" from top, bottom & back. 2-1/2" square trim is 4-1/4"

SECURITY HOSE CABINETS											
1-½" Hose Rack & Extinguisher 2-½" Hose Rack & Extinguisher 1-½" Fire Dept Valve & Extinguisher 2-½" Fire Dept Valve & Extinguisher	**CSF6515**	**CSF6535**	Flat Trim	32-¾"	34-¾"	8"	34-¾" [35-¾"]	36-¾" [37-¾"]	33-¾" [34-¾"]	35-¾" [36-¾"]	8-½" [9"]
	CSF6510	**CSF6530**	2-½" Sq. Trim								6" [6-½"]
	CSF6510	CSF6533	Surface Mt. Sq.	36-¾"	38-¾"	8"	36-⅞"	38-⅞"	-	-	-

Knockouts two each side. Flat and 2-1/2" square trim is 4" from top, bottom & back

SCHOOL


COMPATIBLE EXTINGUISHERS	STEEL	STAINLESS STEEL	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	TRIM O.D. W	TRIM O.D. H	WALL OPENING: NON-RATED [FIRE-RATED] W	WALL OPENING: NON-RATED [FIRE-RATED] H	WALL OPENING: NON-RATED [FIRE-RATED] D
Any Cosmic Any Galaxy Any Mercury Any Saturn Grenadier Sentinel 5-10	**CS2015**	**CS2035**	Flat Trim	12"	27"	7-¾"	14" [15"]	29" [30"]	13" [14"]	28" [29"]	8" [8-¾"]
	CS2010	**CS2030**	2-½" Sq. Trim								5-½" [6-½"]
	CS2013	CS2033	Surface Mt. Sq.	14-⅜"	29-⅜"	7-⅞"	14-½"	29-½"	-	-	-

LIGATURE RESISTANT GUARDSMAN

COMPATIBLE EXTINGUISHERS	STEEL	STAINNLESS STEEL	TRIM PROJECTION	TUB I. D. W (A)	TUB I. D. H (B)	TUB I. D. D (C)	TRIM O. D. W (E)	TRIM O. D. H (F)	WALL OPENING: NON-RATED [FIRE-RATED] W	WALL OPENING: NON-RATED [FIRE-RATED] H	WALL OPENING: NON-RATED [FIRE-RATED] D
Cosmic, Galaxy 2.5 - 10 lb Mercury 2.5 - 5 lb Sentinel 5 lb	**CL1015M2**	**CL1035M2**	3/16" Flat Angled	10-½"	24"	6"	13"	26"	11-½" [14-½"]	25" [27-½"]	5-⅞" [6-15/16"]
	CL1017M2	**CL1037M2**	3" Angled				14"	29"			3-⅛" [4"]
	CL1013M2	CL1033M2	Surface Mt. Angled	13-11/16"	27-3/16"	6-½"	16"	33"	-	-	-
Any Cosmic/Galaxy (mount 20 lb to tub) Mercury 2.5 - 15.5 lb (mount 15.5 lb to tub) Sentinel 5-10 lb Granadier, Saturn, Nebula 270	**CL2015M2**	**CL2035M2**	3/16" Flat Angled	12"	27"	7-¾"	14-½"	29"	13" [16"]	28" [32"]	7-⅝" [6-11/16"]
	CL2017M2	**CL2037M2**	3" Angled				16"	32"			5-⅜" [6-7/16"]
	CL2013M2	CL2033M2	Surface Mt. Angled	15-3/16"	30-3/16"	8"	18"	38"	-	-	-

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

SECURITY DOOR AND LOCK STYLES

CABINET DOOR	MORTISE CAM	MORTISE DEADBOLT
	**M2** Kaba Ilco *Available for Series: Security SFC series, Guardsman series*  	**B2** Kaba Ilco *Available for Series: Security SFC series, Guardsman series*  
	**M5** Temporary Green Core *Available for Series: Security SFC series, Guardsman series*  	**B4** Temporary Green Core *Available for Series: Security SFC series, Guardsman series*  
CABINET DOOR	**DETENTION SLAM**	**DETENTION DEADBOLT**
	J1E Airteq 5017 *Available for Series: Security SFC series*  	**K1E** Airteq 5010 *Available for Series: Security SFC series*  
	**JM1E** Airteq Mogul 5017M *Available for Series: Security SFC series*  	**KM1E** Airteq Mogul 5010M *Available for Series: Security SFC series*  

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



CKBSM-M2



CKBRC-M2

SECURITY LOCK BOXES

Security lock boxes proved controlled storage for keys or other physical items.

PRODUCT DETAILS:

Material: 18 gauge cold rolled steel
Finish: Powder coat white
Trim Styles: Recess flat and surface-mount
Lock: Installed mortise cam with two keys



LBFD



LB

KEY LOCK BOXES

Key lock boxes provide rapid non-destructive entry into locked buildings and other areas by authorized personnel.

PRODUCT DETAILS:

Material: Cold rolled steel
Finish: Powder coat
Trim Styles: Surface-mount
Lock: Padlock hole accomodations

LOCK BOXES		
MODEL	DESCRIPTION	SIZE
CKBRC-M2	Security lock box recessed mount with installed mortise cam	5-¼" x 5-¼" x 2-½"
CKBSM-M2	Security lock box surface mount with installed mortise cam	5" x 5" x 2-½"
LBFD	Fire department key lock box, surface mount, red	4" x 6" x 1-½"
LB	Key lock box, surface mount, white	4" x 6" x 2-½"

SECURITY LOCK BOXES	
MODEL	DESCRIPTION
PL	Blue Padlock with 2 Keys
PLB	Gold Padlock with 2 Keys



PL



PLB

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.


9263Z30


916AZ30

CLASSIC™ SERIES: GALVANNEAL OR ALUMINUM

Our Classic Series provides a durable cabinet for use in exterior or damp conditions. Select from a wide rage of sizes that will fit most 2-½ - 10 lb extinguishers.

PRODUCT DETAILS:

Tub and Door Frame: White powder coated cabinet of rust-resistant galvanneal steel, or aluminum
Door: .060" acrylic front for protection from the elements. Breaker bar and lock standard
Trim: Surface mount or semi-recessed versions with a 2-¾" or 4-½" trim flange
Fire-Rated Option: No
Options: See page 33 for other powder coat colors


5113N20


502AN20

ECONOMYLINE™ SERIES: SURFACE-MOUNTED

A cost effective selection in either an aluminum or steel cabinet that can be locked with a padlock for tamper-resistance.

PRODUCT DETAILS:

Construction: Available in steel or aluminum. Both materials painted in powder coat paint
Door: Sliding .060 clear acrylic front with retainer clip. Breaker bar with chain, pre-drilled holes on top lip for padlock
Fire-Rated Option: No
Options: See page 33 for locks, other powder coat colors


5019G20


521AN20

DECORLINE™ SERIES: STEEL OR ALUMINUM

The Decorline Series offers an economical solution for interior or exterior applications. Select from a wide range of sizes that will fit most 2-½-10 lb extinguishers. Choose from semi-recessed or surface mount.

PRODUCT DETAILS:

Construction: Cold rolled steel tub (interior) or aluminum (exterior) with white or gray hammertone powder coat finish
Trim: Surface mount or semi-recessed with a 2-½", 3", or 4-⅜" trim
Door: Models with "AN" designation have slide in acrylic front secured by clips and tab for lock at top. All other models have door with continuous hinges and either solid door or door with acrylic window top and breaker bar with chain
Fire-rated Option: No
Options: See page 33 for locks, other powder coat colors

LEGACY CABINETS TO BE PHASED OUT BY JUNE 2027


SMB-W25


9123FJ30
SM SERIES

SMB SERIES: SURFACE-MOUNTED BUBBLE CABINET

PRODUCT DETAILS:

Construction: An economical surface mount bubble cabinet
SMB Recommended Replacements: Clear Vu Series (see pages 10-11)

SM SERIES: SURFACE-MOUNTED CABINET

PRODUCT DETAILS:

Construction: Aluminum with white powder coat finish. Plexiglass front slides in
SM Recommended Replacements: Classic and Economyline

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

CLASSIC

COMPATIBLE EXTINGUISHERS	GALVANNEAL STEEL	ALUMINUM	PREVIOUS MODEL	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	WALL OPENING W	WALL OPENING H	WALL OPENING D	CABINETS PER CARTON
Cosmic 2.5 - 6 Galaxy 2.5 - 5.5 Mercury 2.5 - 5 Sentinel 5	**916AZ30**	**912AZ30**	**99GT**	2-¾" Trim Flange	8-½"	19-13⁄16"	6-¼"	9"	20-15⁄16"	3-¾"	2
	9163Z30	9123Z30	99G	Surface Mount				-	-	-	2
Cosmic 2.5 - 10 Galaxy 2.5 - 10 Mercury 2.5 - 5 Sentinel 5	**926AZ30**	**922AZ30**	**999GT**	2-¾" Trim Flange	9-½"	25-¾"	6-¼"	10"	26-¼"	3-¾"	2
	9263Z30	9223Z30	999G	Surface Mount				-	-	-	2
Any Cosmic, Any Galaxy, Any Mercury, Any Saturn Grenadier Sentinel 5	936AZ30	932AZ30	104GT	4-½" Trim Flange	10-½"	29-¾"	8-¼"	11"	30-¼"	4"	1
	9363Z30	9323Z30	104G	Surface Mount				-	-	-	1

ECONOMYLINE

COMPATIBLE EXTINGUISHERS	STEEL	ALUMINUM	PREVIOUS MODEL	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	CABINETS PER CARTON
Cosmic 2.5-6 Galaxy 2.5-5.5 Mercury 2.5-5	5013N20	5023N20	818	Surface Mount	8-⅛"	18"	5-½"	2
Cosmic & Galaxy 2.5-10 Mercury 2.5-5 Sentinel 5	5113N20	5123N20	924	Surface Mount	9-⅛"	24"	5-½"	2
Any Cosmic, Galaxy, Mercury, Saturn, Sentinel 5 Grenadier	5213N20	5223N20	1028	Surface Mount	10-⅛"	28"	8-¼"	2

DECORLINE

COMPATIBLE EXTINGUISHERS	STEEL	ALUMINUM	PREVIOUS MODEL	TRIM PROJECTION	TUB I.D. W	TUB I.D. H	TUB I.D. D	TRIM O.D. W	TRIM O.D. H	WALL OPENING W	WALL OPENING H	WALL OPENING D	CABINETS PER CARTON
SLIDE-IN ACRYLIC FRONT - SEMI RECESSED WITH BREAKER BAR													
Cosmic 2.5 - 6 Galaxy 2.5 - 5.5 Mercury 2.5 - 5	**501AN20**	**502AN20**	**818T**	2-½" Trim	8-⅛"	18"	5-½"	11-¼"	21-¼"	9"	19"	4"	2
Cosmic 2.5 - 10 Galaxy 2.5 - 10 Mercury 2.5 - 5 Sentinel 5	**511AN20**	**512AN20**	**924T**	2-½" Trim	9-⅛"	24"	5-½"	12-⅛"	27"	10"	25"	4"	2
Any Cosmic, Galaxy Mercury, Saturn Grenadier Sentinel 5	**521AN20**	**522AN20**	**1028T**	2-½" Trim	10-⅛"	28"	8-¼"	13-⅛"	31"	11"	29"	6"	2
	5218N20	5228N20	1028T4	4-⅝" Trim								4"	2
DOOR WITH CONTINUOUS HINGE - SOLID DOOR (S21) ACRYLIC DOOR & HANDLE(F20)ACRYLIC DOOR, HANDLE & LOCK (G20)													
Cosmic 2-½ - 6 Galaxy 2.5 - 5.5 Mercury 2.5 - 5	**5017**	**5027**	**818TDH/818TDL 818TDHS**	3" Trim	8-⅛"	18"	5-½"	11-¼"	21-¼"	9"	19"	3-¼"	2
	5019	5029	818DH/818DL 818DHS	Surface Mount				8-⅛"	18"	-	-	-	2
Cosmic 2.5 - 10 Galaxy 2.5 - 10 Mercury 2.5 - 5 Sentinel 5	**5117**	**5127**	**924TDH/924TDL 924TDHS**	3" Trim	9"	23-⅞"	5-⅝"	12-¼"	27-¼"	10"	25"	3-¼"	2
	5119	5129	924DH/924DL 924DHS	Surface Mount				9-⅛"	24"	-	-	-	2

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



Chief (white) showing hammer break tool



Chief (red) showing optional break bar



Island Chief (red)



Island Chief (white)

CHIEF SERIES:

SURFACE-MOUNT, PLASTIC, BREAK PANEL

Cato's affordable fire extinguisher series, manufactured in the U.S, provides a dent and rust proof alternative to metal. Cato's Chief series fire extinguisher cabinets feature a security hexagonal lock and key to open and remove the trim and acrylic panel, which features scored lines to easily break when struck with tool in case of fire.

Tub and Trim Material: Injection molded high impact polystyrene in .110 thickness with ultra-violet inhibitors for UV resistance

Tub and Trim Colors: Available in red or white

Cover Material: .080 Acrylic front panel, grid scored for improved emergency access with break tool

Acrylic Colors: Available in clear or red (for best outdoor UV resistance)

Break Tool: Polypropylene injection molded aluminum tipped hammer with ribbed grip handle and a clear nylon coated stainless steel cable that matches trim color

Break Tool Option: Stainless steel break bar

Decals: UV resistant "FIRE" and "Break Panel" decals included

Hardware: ABS hexagonal lock and keys (2 included) are used to remove the trim and pull panel cover to open the cabinet

Sizes: Refer to table, listing model sizes with their compatible extinguishers from 2.5 - 20 lbs

Additional Options: Fire extinguisher rust prevention tray

ISLAND CHIEF SERIES:

SURFACE-MOUNT, PLASTIC, PULL PANEL

Cato's Island Chief series fire extinguisher cabinets are MRI safe and feature a clear PETG hand-pull panel to easily gain access in case of fire. The cabinet can also be opened using the security hexagonal lock and key to remove the pull panel cover.

Tub and Trim Material: Injection molded high impact polystyrene in .110 thickness with ultra-violet inhibitors for UV resistance

Tub and Trim Colors: Available in red or white

Cover Material: .030 PETG (polyethylene terephthalate glycol) panel with oval notch cut out to complete the pull panel design

Panel Colors: Available in clear only

Decals: UV resistant "FIRE" labels on exterior tub sides, "Tampering is a Felony" and MR Safe labels on pull panel

Hardware: ABS hexagonal lock and keys (2 included) are used to remove the trim and pull panel cover to open the cabinet

MRI Safety Information: MR Safe labeled, as defined in ASTM F2503. This product is safe to use in a magnetic resonance imaging environment. It is composed of materials that are electrically non-conductive, non-metallic and non-magnetic.

Sizes: Refer to table, listing model sizes with their compatible extinguishers from 2.5-20lbs. Including non magnetic extinguisher models Nebula, Sentinel and Ansul CleanGuard

Additional Options: Fire extinguisher rust prevention tray

CHIEF & ISLAND CHIEF

COMPATIBLE EXTINGUISHERS	PREVIOUS MODEL CHIEF	PREVIOUS MODEL ISLAND CHIEF	TUB I.D. W x H x D			TRIM O.D. W x H x D		
Cosmic 2.5-5.5 Galaxy 2.5-5.5	105-5	105-5 P	6"	16-¾"	5-⅜"	8-¼"	19-¼"	6-¾"
Cosmic 2.5-10 Galaxy 2.5-10 Mercury 2.5-11	105-10	105-10 P	6-¾"	20-½"	6"	9-¼"	23-¼"	7-¼"
Cosmic 2.5-20 Galaxy 2.5-20 Mercury 2.5-15.5 Sentinel 5, Saturn 15 Non-Magnetic FE: Nebula 270-272, Ansul Cleanguard 13NM	105-20	105-20P	9"	26"	8"	11-½"	28-½"	9-½"

MR

MR Safe Decal included on Island Chief

SEE PAGE 28 FOR CURRENT MODEL NUMBER STRUCTURE

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



Chief Pull to Open (white)



Chief Pull to Open (red)



Chief Semi Recessed only available in white shown with included decal CL-412 "Fire Extinguisher"

CHIEF PULL-TO-OPEN SERIES:

SURFACE-MOUNT, PLASTIC, HINGED DOOR

Cato's Chief Pull-to-Open series fire extinguisher cabinets feature a unique hinged acrylic door style with pull handle to allow quick access in case of fire.

Tub and Trim Material: Injection molded high impact polystyrene in .110 thickness with ultra-violet inhibitors for UV resistance

Tub and Trim Colors: Available in red or white

Cover Material: .080 Acrylic front panel

Acrylic Colors: Available in clear only

Decals: UV resistant "FIRE" and "Pull Handle Firmly" decals included

Hardware: Black ABS Handle 3.75" long with a 1.25" projection, two stainless steel hinges, a zinc plated roller catch with strike plate, and hexagonal lock with key installed to secure trim to tub

Sizes: Refer to table, listing model sizes with their compatible extinguishers from 2.5 - 11 lbs

Additional Options: Fire extinguisher rust prevention tray

CHIEF SEMI RECESSED SERIES:

SEMI RECESSED, PLASTIC, HINGED DOOR

Cato's Chief Semi Recessed fire extinguisher design is built with a 2.875" trim projection and meets ADA cabinet projection requirements. The hinged door is designed with an acrylic window and pull handle.

Tub and Trim Material: Injection molded polypropylene in .15 thickness

Trim Style: 2-⅞" rounded edge

Tub and Trim Colors: Available **white** only

Cover Material: .080 Acrylic front panel

Acrylic Colors: Available in clear only

Decals: Red vertical "FIRE EXTINGUISHER" decal included, mounts to door or panel

Hardware: Stainless steel hinge, glass clip, handle and roller catch

Sizes: Refer to table, listing model sizes with their compatible extinguishers from 2.5 - 10 lbs

Additional Options: Fire extinguisher rust prevention tray, cylinder lock with flexible cam

CHIEF-PULL-TO OPEN

COMPATIBLE EXTINGUISHERS	PREVIOUS MODEL	TUB I.D. W x H x D			TRIM O.D. W x H x D		
Cosmic 2.5-5.5 Galaxy 2.5-5.5	105-5 Z	8"	19-¾"	6-⅜"	8-¼"	19-¼"	6-¾"
Cosmic 2.5-10 Galaxy 2.5-10 Mercury 2.5-11 Sentinel 5	105-10 Z	9-¼"	23"	7"	9-¼"	23-¼"	7-¼"



10006R Hex Key
Included on Pull to Open, Chief, and Island Chief.
Also available in white. Key color matches trim color.

CHIEF SEMI RECESSED

COMPATIBLE EXTINGUISHERS	PREVIOUS MODEL	* TUB I.D. W x H x D			TRIM O.D. W x H x D		
Cosmic 2.5-10 Galaxy 2.5-10 Mercury 2.5-5 Sentinel 5	405-10	8-½"	23-¼"	5-⅝"	13-⅜"	27-⅝"	2-⅞"

* For wall opening W x H x D: 10-½" x 25" x 4"

SEE PAGE 28 FOR CURRENT MODEL NUMBER STRUCTURE

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.




Warrior
white with clear cover



Warrior
white with red cover



Warrior
red with clear cover

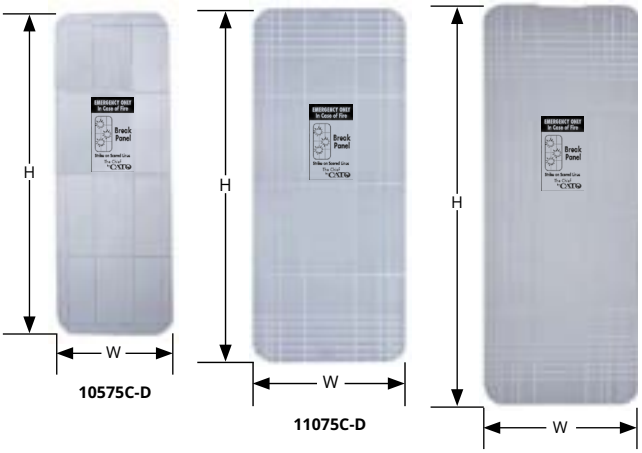

WARRIOR SERIES:

SURFACE-MOUNT, PLASTIC, TWO PIECE DESIGN

Cato's Warrior series fire extinguisher cabinet is a two- piece construction with a locking seal. No additional padlock is required. Simply pull up to break the seal and remove the cover to access extinguisher inside.

Tub Material: Injection molded high-impact polystyrene in .110 thickness with UV inhibitors for UV resistance

Tub Colors: Available in red or white

Cover Material: .100 crystal polystyrene with pull handle located at the bottom and etched "PULL" lettering

Cover Colors: Available in clear or red (for best outdoor UV resistance)

Decals: UV resistant "FIRE" and "Crime Warning" decals included

Hardware: Plastic locking seal included, white only

Sizes: Refer to table, listing model sizes with their compatible extinguishers from 2.5 - 11 lbs

WARRIOR

COMPATIBLE EXTINGUISHERS	PREVIOUS MODEL	TUB I.D. W x H x D			TRIM O.D. W x H x D		
Cosmic 2.5-5 Galaxy 2.5-5 Mercury 2.5	95-5	8"	19"	6-⅜"	8-¼"	20-½"	6-¾"
Cosmic 2.5-10 Galaxy 2.5-10 Mercury 2.5-11 Sentinel 5	95-10	9"	23"	7"	9-¼"	24-½"	7-¼"

See page 24 for current model number structure



95505
Locking Seal
Included with Warrior

CUSTOMIZER PANEL:

FIRE EXTINGUISHER CABINETS

Cato's patented UV resistant acrylic contains grid lines for trimming to size on-site. It fits most Economy line cabinets for 5, 10 and 20lb extinguishers.

Material: .080 Clear acrylic, UV resistant with scored grid lines

Decal: UV resistant "Break Panel" decal included

Additional info: Three sizes available to fit up to most Economy line 5, 10, and 20 lb fire extinguisher cabinets

Sizes: Refer to table

CUSTOMIZER PANEL

MODEL	DIMENSIONS W x H	FITS CHIEF PREVIOUS MODEL
10575C-D	7-⅝" x 18-¾"	105-5
11075C-D	8-⅝" x 22-⅝"	105-10
12075C-D	10-⅝" x 27-¾"	105-20

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

CATO ACCESSORIES:

ACCESSORIES	
ITEM	DESCRIPTION
10300	Fire Extinguisher Rust Prevention Tray (not available for previous model 105-20)




10300
Fire Extinguisher Rust Prevention Tray Accessory

DECALS	
ITEM	DESCRIPTION W x H
CL-401R	Fire Extinguisher "Fire" with red background 3" x 9"
CL-401W	Fire Extinguisher "Fire" with white background 3" x 9"
CL-403	"Fire Extinguisher" Arrow 4" x 18"
CL-412	"Fire Extinguisher" 1" x 15"
CL-413	"Fire Extinguisher" Arrow 4" x12"
CL-415	"Break Panel" 2" x 3-½"
CL-416	"Felony Warning" Red 3" x 5"
CL-416A	Pull Panel "Felony Warning" 2-¼" x 4"
CL-424	"In Case of Fire Pull Handle Firmly" 1" x 4"
CL-422	"Extinguisher Missing" 1-½" x 8-½"
CL-423	"Kitchen Suppression" 4-¾" x 3"
CL-95	Pull Up Cover "Crime Warning" 6" x 5"



CL-401R or CL-401W
FIRE decal available with red or white background (matches tub color).
Included on all models except Chief Semi Recessed



CL-415 Decal
Included with Chief




CL-416 Decal



CL-416A Decal
Included with Island Chief



CL-403
CL-413

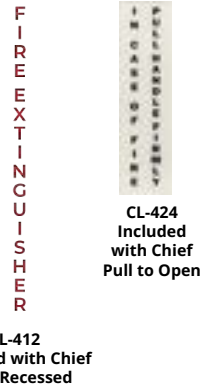


CL-412
Included with Chief Semi Recessed

CL-424
Included with Chief Pull to Open



CL-422



CL-423



CL-95
Included with Warrior

REPLACEMENT PARTS AND MORE INFORMATION AVAILABLE. PLEASE REFER TO SUBMITTALS.

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

C 1 0 5 5 1 - H - __

- **Product Series - Tub Size**
- **Tub / Trim / Acrylic Cover Color**
- **Opening Method**
- **Packaging**

PRODUCT SERIES - TUB SIZE

Chief, Island Chief, Chief Pull to Open			Chief Semi Recessed			Warrior		
Tub Size	Previous Model	Fits Fire Extinguisher	**Tub Size**	Previous Model	Fits Fire Extinguisher	**Tub Size**	Previous Model	Fits Fire Extinguisher
105	105-5	5 lb	**405**	405-10	10 lb	**950** (white)	95-5	5 lb
110	105-10	10 lb				**955** (red)	95-5	5 lb
120	105-20	20 lb*				**951** (white or red)	95-10	10 lb

* Not available on Chief Pull to Open

TUB / TRIM / ACRYLIC COVER COLOR

All Chief Models Tub / Trim / Acrylic Cover Color		Warrior for 5 lb Cover Color		Warrior for 10 lb Tub / Cover Color	
01	**WWC** - White, White, Clear	(not available)		**01**	**WC** - White, Clear
02	**WWR** - White, White, Red	(not available)		**02**	**WR** - White, Red
13	**WRC** - White, Red, Clear	(not available)		(not available)	
51	**RRC** - Red, Red, Clear	**51**	Clear Cover	**51**	**RC** - Red, Clear
52	**RRR** - Red, Red, Red	**52**	Red Cover	**52**	**RR** - Red, Red
63	**RWC** - Red, White, Clear	(Warrior combinations shown below)			

OPENING METHOD

Chief		Island Chief		Chief Pull to Open		Chief Semi Recessed	
H	Hammer*	**P**	Pull Panel	**Z**	Pull Handle	(none)	Pull Handle, non locking
B	Break Bar	Note - Opening method not needed in Warrior series				**L**	Cylinder Lock (optional)


*Hammer color matches trim color

PACKAGING


Unassembled		Individually Packed	
(none)	Bulk packed based on max quantity	**I**	Cabinets are individually assembled and packaged
12	5lb size ships max 12 per box		
10	10 lb size ships max 10 per box		
4	20lb size ships max 4 per box		

*Cabinets come unassembled and bulk packed as standard option

BREAK TOOL - CHIEF ONLY
(Hammer color matches trim color)

H Red Hammer Assembly	
H White Hammer Assembly	
B Stainless Steel Break Bar	

WARRIOR SERIES
Tub/Cover Color Combinations



Warrior WC White body Clear cover	Warrior WR White body Red cover	Warrior RC Red body Clear cover	Warrior RR Red body Red cover

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.





SECURED FIRE ALARM COVER:
PLASTIC FIRE ALARM COVER

Cato's Protective Alarm Cover with Security Cover is vandal resistant and contains a side slot to hold the break bar in place when not in use. It arrives fully assembled and is quick to install.

Body and Cover Material: Injection molded of high-density polypropylene, available in red only

Acrylic Material: .080 Acrylic front panel, grid scored for improved emergency access with break tool. Available in clear only

Break Tool: Galvanized steel break bar and clear nylon coated stainless steel cable

Decals: UV resistant "BREAK PANEL" and "FIRE" decals included

Hardware: Mounting hardware and anchors are included

Sizes: Refer to table, listing models and dimensions. Available for recessed or surface mounted alarms

Options: Gasket

PULL TO OPEN FIRE ALARM COVER:
PLASTIC FIRE ALARM COVER

Cato's Pull to Open Fire Alarm Cover arrives fully assembled, is quick to install, and the cover can be opened quickly in case of emergency and remains open during inspection and maintenance.

Body Material: Injection molded of high-density polypropylene, available in red only

Cover Material: Injection molded copolymer polypropylene, available in clear only. Pull handle at the top is designed to ADA specifications

Decals: UV resistant "PULL TO OPEN" and "FIRE" decals included

Hardware: Mounting hardware and anchors are included

Sizes: Refer to table, listing models and dimensions. Available for recessed or surface mounted alarms


Options: Gasket

FIRE ALARM COVER					
PREVIOUS MODEL	ALARM MOUNTING	COVER I. D. W x H x D	COVER O. D. W x H x D	VIEWABLE WINDOW	WEIGHT
220R	Recessed Mounted Alarm	6-¼" x 7-¼" x 1-¾"	7-½" x 8-¼" x 2-¼"	5" Square	1.5 lbs
220S	Surface Mounted Alarm	6-½" x 7-½" x 3-¼"	7-½" x 8-¼" x 3-¾"	5" Square	1.7 lbs

Please see submittal for more detailed information



CL-419 Decal
Included with Secured Fire Alarm Cover Only
1-¾" x 1-¾"



Hardware
Included with both models



CL-420 Decal Included with both models
1/2" x 1-½"



CL-418 Decal
Included with Pull to Open Fire Alarm Cover Only
1/2" x 4-½"

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

ALARM AND LETTERING OPTIONS



C-KIT-CA



C-KIT-SA



BA


ALARM OPTIONS

MODEL	DESCRIPTION	OPERATION
C-KIT-CA	Commander alarm kit (CA option ordered with cabinet)	85dB warning horn sounds alert when plunger switch is activated as the cabinet door is opened
C-KIT-SA	Strobe alarm kit (SA option ordered with cabinet)	10dB warning horn sounds and red light flashes wen cabinet door is opening The strobe alarm works in conjunction with the commander alarm door position sensor to sound an alert for 2 minutes when the door is opened
BA	Brigadier alarm	Mini Theft Stopper audio alarm with door position sensor for fire extinguishers in cabinets


SILKSCREENING, ETCHING AND ENGRAVING OPTIONS

LETTERING PROCESS	WORDING	ORIENTATION	COLOR	COMPONENT*
Silkscreen (door or glazing)	FIRE EXTINGUISHER	Vertical	Red	Door
Etching (glazing)	FIRE BLANKET	Horizontal	Black	Glazing
Engraving (door)	FIRE HOSE	Ascending	White	
	FIRE DEPARTMENT VALVE			


*For silk screen only on DUO style doors (V, W, D, E, A)

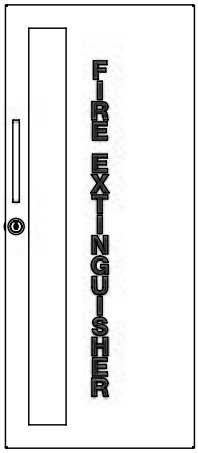


SSC02D/ENC02D centered in black shown on door

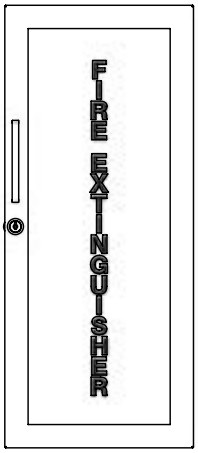


SSC02/ETC02 centered in black shown on glazing

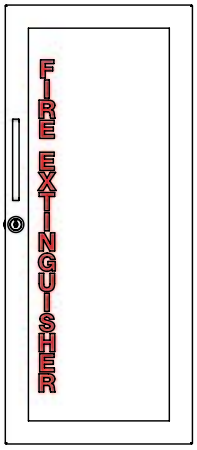

SS01/ET01 in red shown on glazing

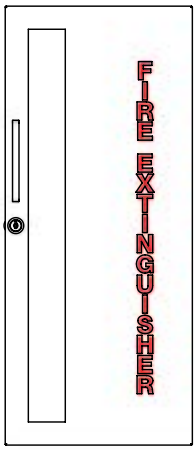

SS01D/EN01D in red shown on door

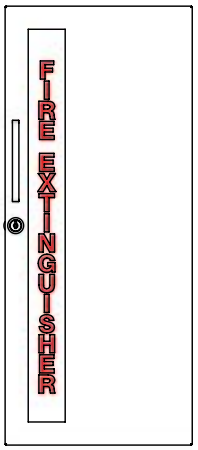

SS01G/ET01G in red shown on glazing

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

HANDLE OPTIONS

MODEL	DESCRIPTION	MATERIAL
PUF	Futura “FIRE" handle	Mill
PUFW		White Paint
PUFR		Red Paint
PRH	Flush, plastic pull handle (A option must be ordered with cabinet)	Black
PUS-US10B	Satin oil-rubbed bronze pull	US10B
PUS-US10	Satin bronze pull	Bronze
PUS-US3	Polished brass pull	Brass
PUS-US32D	Stainless steel pull	Stainless
PUCH	Zinc pull with chrome finish	Chrome
PUS	Standard on most cabinets	Zinc
C-KIT-LH	Lever handle, catch, screws (LH option must be ordered with cabinet)	Chrome



PUF **PUFW** **PUFR**



PRH



PUS-US10B **PUS-US10** **PUS-US3** **PUS-US32D** **PUCH** **PUS**



C-KIT-LH



C2017S21FX2-R12
Red Door/Trim, White Tub



C1017F10-BK4SS03
Silkscreen, Vertical, White, Painted Black

FIRE PROTECTION COLOR CHART

White | W

Gray | G

Bronze | B

Red | R

White Textured | WT

Gray Textured | GT

Bronze Textured | BT

Red Textured | RT

White Hammertone | WH

Gray Hammertone | GH

AMS Beige | AB

Orange | O

Silver | SI

Flat Black | FB

SC Beige | SB

Yellow | Y

Brass | BA

Black | BK

Sand | S

Aluminum Finishes

Clear Anodized | 2

Dark Bronze Anodized | 9

COLORS SHOWN IN THIS CATALOG ARE APPROXIMATE. CONTACT SALES@ACTIVARCPG.COM TO REQUEST A SAMPLE.

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



Vertical Decal



Vertical Decal




Vertical Diecut

(2" Lettering)



Ascending Diecut



PHCD-RED



Horizontal Decal



Horizontal Diecut

MODEL	TITLE/DESCRIPTION	ORIENTATION	DECAL OR DIECUT	COLORS	SIZE
LDVRFE	FIRE EXTINGUISHER	Vertical	Decal	Red & Clear	2" x 19"
LDVWFE				White & Clear	
LDVBFE				Black & Clear	
LDCVRFE	FIRE EXTINGUISHER	Vertical	Diecut	Red	3/4" x 18"
LDCVRRFE				Red (Reverse)	
LDCVWFE				White	
LDCVWRFE				White (Reverse)	
LDCVBFE				Black	
LDCVBRFE				Black (Reverse)	
LDCVRFE-ESM-A	FIRE EXTINGUISHER (14" height fits 8100 & 18" high cabinets)			Red	3/4" x 14"
LDCVBFE-ESM-A				Black	
LDCHRFE-2	FIRE EXTINGUISHER Fits architectural cabinets except for 8100 & Clear Vu (2" Lettering meets IBC)	Ascending	Diecut	Red	4-½" x 21"
LDCHWFE-2				White	
LDCHBFE-2				Black	
LDCARFE	FIRE EXTINGUISHER			Red	3/4" x 18"
LDCABFE				Black	3/4" x 18"
PHCD-RED	IN CASE OF FIRE PULL HANDLE	Vertical	Decal	Red & White	1" x 4-¼"
LDHRFE	FIRE EXTINGUISHER	Horizontal	Decal	Red & White	7-⅛" x 2-¼"
LDHWFE				White	
LDHBFE				Black & White	
LDCHRFE	FIRE EXTINGUISHER	Horizontal Diecut	Diecut	Red	2-¼" x 7-¾"
LDCHWFE				White	
LDCHBFE				Black	

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.



LD469Z82



DRFA



DRWF



S26



1403

FIRE HOSE VALVE

LCDCHRFH



LDCHRFB



LDCHRFDV-R



FDVO

MODEL	TITLE / DESCRIPTION	SHAPE	COLORS	SIZE WxH
LD469Z81	FIRE EXTINGUISHER INSIDE	Graphic - Decal	Red & White	5" x 7"
LD469Z82			Red & White	7" x 10"
DRFA	FIRE EXTINGUISHER ARROW	Vertical - Decal	Red & White	4" x 12"
DRWF	WARNING (CA Penal Code)	Square - Decal	Red & White	4" x 4"
S26	FIRE EXTINGUISHER (CLASS K) English/Spanish	Horizontal - Graphic	Red & White	11-⅞" x 7-¾"
1403	FIRE HOSE (3" high lettering)	Horizontal - Decal	Black & Red	9" x 4"
LDCHRFH	FIRE HOSE VALVE	Horizontal - Diecut	Red	11-½" x 1"
LDCHRFB	FIRE BLANKET	Horizontal - Diecut	Red	1" x 7-⅞"
LDCHRFDV-R	FIRE DEPT. VALVE - (2" Lettering for IBC)	Horizontal - Diecut	Red	10-¼" x 4-⅜"
FDVO	FIRE DEPARTMENT VALVE	Octagonal - Decal	Red, Black & White	6" x 6"
LDCVRFDV	FIRE DEPT VALVE	Vertical - Diecut	Red	¾" x 21-½"
DCVRFDV-R			Red (Reverse)	¾" x 21-½"
LDCHRFDV	FIRE DEPARTMENT VALVE	Ascending - Diecut	Red	1" x 17"
LDCVRFSCV-R	FIRE SPRINKLER CONTROL VALVE	Vertical - Diecut	Red	¾" x 18"
DCVRFHV	FIRE HOSE VALVE	Vertical - Diecut	Red	¾" x 17"



LDCVRFDV



DCVRFDV-R

LDCHRFDV



LDCVRFSCV-R



DCVRFHV

PLASTIC SIGNS

MODEL	DESCRIPTION	SHAPE	SIZE
22S	FIRE EXTINGUISHER	3D angle	4" x 12"
23S		3D tent	4" x 18"
24S		3D tent	5" x 6"
25S		Flush Vertical	4" x 12"
PWS-FE-GLOW		3D angle	18" X 1" X 4"
PWS-FE-GLOW-3W		3D tent	4" X 7-1/2" X 18"
SATURN SIGN	Class K Fire Extinguisher Sign, 3 languages	Graphic flush sign	10-7/8" X 6-15/16"
SATURN SIGN-RED	Class K Fire Extinguisher Sign, 2 languages	Graphic fllush sign	11-7/8" X 7-6/8"



22S



23S



24S



25S



PWS-FE-GLOW



PWS-FE-GLOW-3W



SATURN SIGN



SATURN SIGN-RED

© 2026 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.

CHECK OUT ALL OUR BRANDS WITH A VARIETY OF PRODUCTS!

Manufacturing locations: Minneapolis, MN | Los Angeles, CA | Burnaby, BC, Canada


Warehouses: Fort Myers, FL | Atlanta, GA | Chicago, IL | Fargo, ND | Omaha, NE | Lancaster, PA | Salt Lake City, UT | Dallas, TX | Seattle, WA



ROOF ACCESSORIES



ACCESS PANELS



ENTRANCE MATS, GRATES, & GRILLES



VISION LITES



DOOR LOUVERS



SMOKE VENTS

ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.

800-554-6077
sales@activarcpg.com
www.activarcpg.com

©2026 Activar Construction Products Group, Inc.

10-26-2026