

FIRE-RATED

FIRE EXTINGUISHER CABINET - EMBASSY™ FIRE-FX2™ SERIES

As a leader in the industry, JL Industries offers a decorative cabinet for Upscale applications: The Embassy Series. They offer a sleek and clean look for any building with a flush overlapping door for a finished surface.

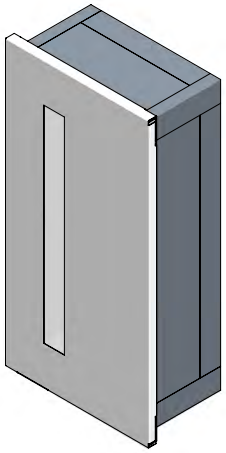

C5614V10FX2

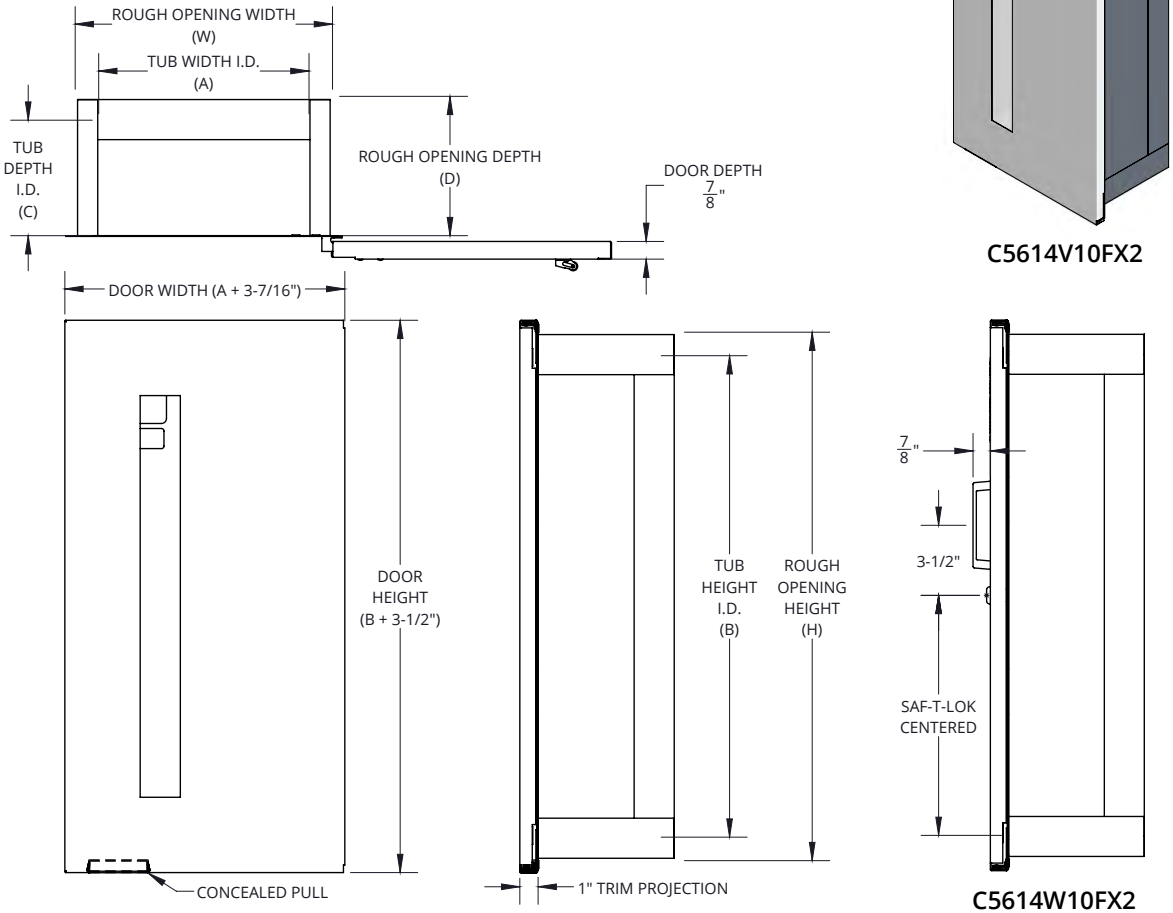

C5614W10FX2

SPECIFICATIONS:

Tub Material & Finish: Steel white powder coat
Tub forms a 1" flange to cover cut edges of wallboard material.
Knockouts: Hose and valve cabinets include dual knockouts for 1-½" and 2-½" diameter pipe located each side of tub, except for surface-mount and fire-rated, that are by others during installation
Trim & Door Material: Steel white powder coat
Trim Projection: Recessed 1" overlapping door - square
Door Style: Vertical duo
Glazing: .090" Clear acrylic
Insulation: Foil-faced mineral wool
Hinge: Two concealed hinges at top & bottom of door; opens to 180°
Hardware: Concealed pull
ADA Compliance: Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount and 4-½" trim style do not comply with ADA.

FIRE-RATINGS:

UL classified and labeled up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/USC-S115.

OPTIONS:

Tub: #4 stainless steel
Trim Material & Finish: Aluminum clear anodized, 304 Stainless steel #4, Bronze US10, Brass US3
Door Material & Finish: Aluminum clear anodized, 304 Stainless steel #4, Bronze US10, Brass US3
Door: Solid
Glazing: 1/8" clear tempered, 1/4" clear wired glass, 1/8" bronze acrylic, 1/8" gray acrylic, 1/4" clear laminated safety glass
Handle: Pull handle of matching material with cylinder SAF-T-LOK™
Alarms: Commander alarm, brigadier alarm, strobe alarm
Material: #6 satin stainless steel, #7 polished stainless steel, #8 mirror stainless steel, US9 polished bronze
Finish: Red, black, other powder coat colors
Lettering: Silkscreen, engraving, etching
Other: Shelf (5900 series only)

ADDITIONAL ACCESSORIES (sold separately)

Die cuts, decals, plastic signs
See supplemental submittals for more information on various options and accessories.

ADA CABINET MOUNTING HEIGHT:

Standard pull on W & L22 door styles with Saf-T-Lok are 3-½" higher than door center, so allow for that when mounting cabinet.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

Established 1999 FIRE SAFETY SUPPLY OEM Distributor
800-498-3473
sales@firesafetysupply.net
www.firesafetysupply.net

Distributor:		Project:	
Contractor:		Approved By:	
Date:		Architect:	
Scale: N/A	Page 1 of 3	Model #:	

© 2026 Activar Construction Products Group, Inc.
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.


11-6-2026

FIRE-RATED


FIRE EXTINGUISHER CABINET - EMBASSY™ FIRE-FX2™ SERIES


QTY MODEL - TRIMLESS WITH OVERLAPPING DOOR						ADA	TUB I. D.			DOOR O. D.		WALL ROUGH OPENING*			WT	COMPATIBLE FIRE EQUIPMENT
STEEL	ALUMINUM	STAINLESS STEEL	US10 BRONZE	US3 BRASS	US4 SATIN BRASS	US3 BRASS	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	LBS	
FIRE EXTINGUISHER CABINETS																	
	C5614		C5624		C5634	C5644	C5654	C5674	C5694	✓	10-½"	24"	5-¾"	13-15/16"	27-½"	12-5/16"	26-5/16"	6-15/16"	29	Cosmic & Galaxy 2.5 - 10 lb Sentinel 5 lb, Mercury 2.5 - 5 lb
	C5714		C5724		C5734	-	-	-	-	✓	16"	32"	7-¾"	19-7/16"	35-½"	18-5/16"	34-5/16"	8-15/16"	44	Any Cosmic, Galaxy, Mercury, Saturn, Nebula 250-272 or Grenadier, Sentinel 5 lb - 15 lb
COMBINATION FIRE DEPARTEMENT VALVE, FIRE HOSE & FIRE EXTINGUISHER CABINETS**																	
	C5514		C5524		C5534	-	-	-	-	✓	18"	18"	7-¾"	21-7/16"	21-½"	20-5/16"	20-5/16"	8-15/16"	20	Valve: KOs 1-½" & 2-½", 1 centered, each side of tub Fire Department Valve
	C5814		C5824		C5834	-	-	-	-	✓	32"	32"	7-¾"	35-7/16"	35-½"	34-5/16"	34-5/16"	8-15/16"	45	Combination Valve & Hose: KOs 1-½" & 2-½"; Fire Department Valve & Extinguisher: Any Cosmic, Galaxy, Mercury, Saturn, Nebula 250-272 or Grenadier P, Sentinel 5 lb - 15 lb
	C5914		C5924		C5934	-	-	-	-	✓	16"	40"	8-¾"	19-7/16"	43-½"	18-5/16"	42-5/16"	9-15/16"	38	Combination Valve & Extinguisher: KOs 1-½" & 2-½"; Fire Department Valve & Extinguisher: any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 lb - 20 lb, Nebula 250-272

Fire-rated specific wall opening

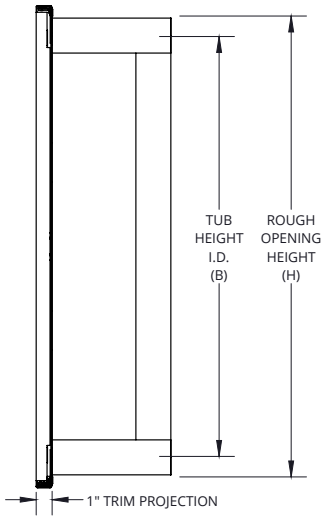

C5814V10FX2 - no knockouts provided
**Knockouts for fire-rated valve & hose cabinets are by others during installation




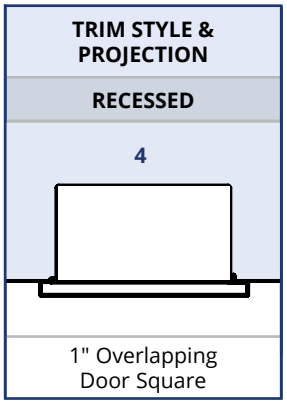


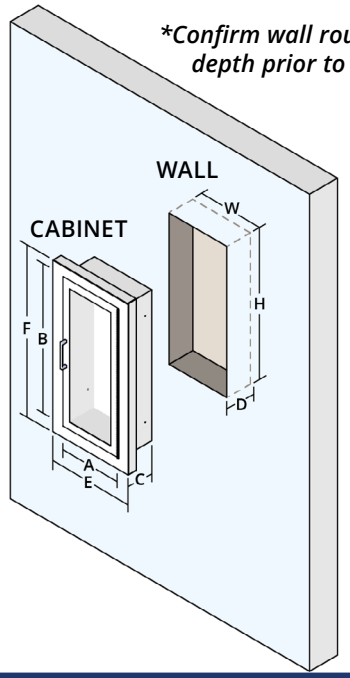

Confirm wall rough opening depth prior to ordering

© 2026 Activar Construction Products Group, Inc.
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

FIRE-RATED
FIRE EXTINGUISHER CABINET - EMBASSY™ FIRE-FX2™ SERIES

	SOLID	VERTICAL DUO
STANDARD PULL	S21	V
		
STANDARD PULL & SAF-T-LOK	L22	W
		

DOOR/LATCH STYLE

MODEL	DESCRIPTION
V	Vertical duo
W	Vertical duo w SAF-T-LOK™
S	Solid (no glazing)
L	Solid (no glazing) w SAF-T-LOK™

GLAZING/DOOR TYPE

MODEL	DESCRIPTION
10	.09" Clear acrylic
13	1/4" Clear wired glass
15	1/8" Bronze acrylic
16	1/8" Gray acrylic
17	1/8" Clear tempered glass
18	1/4" Clear safety glass
21	No glazing, no lock w pull (S21 only)
22	No glazing w SAF-T-LOK™ w pull (L22 only)
24	No glazing w SAF-T-LOK™ and no pull (L24 only)

HANDLE/LATCH OPTIONS (installed at an additional cost)

MODEL	DESCRIPTION
A	Recessed handle
MC	Magnetic latch (steel only; replaces roller catch)

ALARM OPTIONS (installed at an additional cost)

MODEL	DESCRIPTION
CA	Commander
BA	Brigadier
SA	Strobe

MATERIAL OPTIONS

MODEL	DESCRIPTION
F6	#6 Stainless steel finish
F7	#7 Stainless steel finish
F8	#8 Stainless steel finish

FINISH OPTIONS

MODEL	DESCRIPTION
BK	Black door, trim, tub
R	Red door, trim, tub
COLOR - OTHER (please specify)	
Door	
Trim	
Tub	

CUSTOM LETTERING OPTIONS (when manufactured at additional cost)

MODEL	DESCRIPTION
SS	Silkscreen
ET	Etching on glass
EN	Engraving on metal
LETTERING - OTHER (please specify)	
Other	

Refer to supplemental submittal for more options

HANDLE/LATCH OPTIONS (sold separately)

QTY	MODEL	DESCRIPTION
	PUF	Futura "FIRE" Mill
	PUFR	Futura "FIRE" Red
	PUFW	Futura "FIRE" White
	PUCH	Chrome pull handle

PLASTIC SIGNS (sold separately)

QTY	MODEL	DESCRIPTION
	22S	FE, 3D ANGLE, 4" x 12"
	23S	FE, 3D TENT, 4" x 18"
	24S	FE, 3D TENT, 5" x 6"
	25S	FE, FLUSH, 4" x 12"

LETTERING (sold separately)

QTY	MODEL	"FIRE EXTINGUISHER" DESCRIPTION
	LDCVRFE	DIE CUT, VERT, RED, 3/4" x 18"
	LDCVWFE	DIE CUT, VERT, WHITE, 3/4" x 18"
	LDCVBFE	DIE CUT, VERT, BLACK, 3/4" x 18"
	LDVRFE	DECAL, VERT, RED, 3/4" x 18"
	LDVBFE	DECAL, VERT, BLACK, 3/4" x 18"
	LDVWFE	DECAL, VERT, WHITE, 3/4" x 18"
	LDCVRFE-ESM-A	DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14"
	LDCHRFE-2	DIE CUT, HORZ, RED, 2" HIGH, 4-½" x 21"
	Other	

Refer to supplemental submittal for more options

Refer to supplemental submittals for information on more options and accessories.

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

© 2026 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.